

R a i n b o w C T I & M e d i a B r i d g e (M I T E L M I V O I C E 2 5 0) -

A D M I N I S T R A T I O N G U I D E

Rainbow CTI & Media Bridge



Legal notice

Alcatel-Lucent, ALE International and the Alcatel-Lucent logo are trademarks of ALE International. All other trademarks are the property of their respective owners. The information presented is subject to change without notice. ALE International assumes no responsibility for inaccuracies contained herein.

Copyright © 2021 ALE International - All rights reserved.

Index

1	Document History	5
2	Introduction	8
2.1	<i>Overview - The Product</i>	8
2.2	<i>Overview - The Guide</i>	8
2.3	<i>Architecture Diagram</i>	9
3	Configuration	10
3.1	<i>Administration - Startup</i>	10
3.2	<i>Configuration Settings</i>	14
3.2.1	Rainbow Settings	15
3.2.2	Proxy Settings	15
3.2.3	Equipment Settings	15
3.3	<i>PABX Settings</i>	17
3.3.1	Connectivity Settings	18
3.3.2	SIP Trunk Settings	19
3.4	<i>Media Gateway</i>	21
3.4.1	Media Settings	22
3.4.2	Remote Extensions Numbering Plan	23
3.4.3	Caller ID Policy for VOIP calling	23
3.5	<i>Starting and Stopping Rainbow CTI & Media Bridge Service</i>	26
4	Calls and Extensions	28
4.1	<i>Dashboard</i>	28
4.2	<i>Extensions & User Entries</i>	29
4.2.1	CTI & VOIP	32
4.3	<i>Monitored Extensions</i>	35
4.4	<i>Unsuccessful monitoring of extensions</i>	39
4.5	<i>Seeing active calls in the system</i>	42
4.6	<i>Seeing active users in the system</i>	44
5	General	51
5.1	<i>System Settings</i>	51
5.1.1	Traces	52
5.1.2	SMTP Settings	53
5.2	<i>Business Partner</i>	55

5.3 Report an Issue..... 57

6 Change Password..... 60

1 Document History

Edition	Date	Changes / Comments / Details
01	03/06/2020	Initial Administration Guide.
02	07/03/2021	<p>Legal notice has been updated.</p> <p>Section 2.3 Architecture diagram has been updated.</p> <p>Section 3.1 Screenshot has been updated.</p> <p>Section 3.2 Screenshots have been updated. PBX settings has been updated to Equipment Settings.</p> <p>Section 3.2.1 Screenshot has been updated.</p> <p>Section 3.2.2 Screenshot has been updated.</p> <p>Section 3.2.3 Title of section has been updated. Screenshots have been updated.</p> <p>Section 3.3 Title of section has been updated. Screenshots have been updated. Titles of sections have been updated.</p> <p>Section 3.3.1 New section has been added.</p> <p>Section 3.3.2 New section has been added.</p> <p>Section 3.4 Details about Media Gateway has been updated. Screenshots have been added.</p> <p>Titles of sections have been updated.</p> <p>Section 3.4.1 Title of section has been updated. Details about media settings section has been updated. Screenshots have been updated.</p> <p>Section 3.4.2 Title of section has been updated. Details about remote extensions section has been updated. Screenshots have been updated.</p> <p>Section 3.4.3 New section has been added.</p> <p>Section 3.5 Screenshots have been updated.</p> <p>Section 4.1 Screenshots have been updated.</p> <p>Section 4.2 Screenshots have been updated.</p> <p>Section 4.2.1 Screenshots have been updated.</p> <p>Section 4.3 Screenshots have been updated.</p> <p>Section 4.4 Screenshots have been updated.</p> <p>Section 4.5 Screenshots have been updated.</p> <p>Section 4.6 New Section has been added.</p>

Edition	Date	Changes / Comments / Details
		<p>Section 5.1 Screenshots have been updated.</p>
03	25/05/2021	<p>Section 2.3 Architecture diagram has been updated.</p> <p>Section 3.1 Screenshots have been updated. Description for Administration start up has been updated. Screenshots have been added.</p> <p>Section 3.2 Screenshots have been updated.</p> <p>Section 3.3 Screenshots have been updated.</p> <p>Section 3.3.1 Description for Dial Plan Context has been updated. Description for External Outbound Prefix has been added.</p> <p>Section 3.3.2 Screenshot has been updated.</p> <p>Section 3.4 Description for Media Gateway has been updated. Screenshot has been updated.</p> <p>Section 3.4.1 Description for Media Settings has been updated. Screenshot has been updated.</p> <p>Section 3.4.2 Screenshot has been updated.</p> <p>Section 3.4.3 Screenshot has been updated.</p> <p>Section 3.5 Screenshots have been updated.</p> <p>Section 4 Title of section has been updated.</p> <p>Section 4.1 Title of section has been updated. Screenshots have been updated.</p> <p>Section 4.2 Screenshots have been updated.</p> <p>Section 4.2.1 Screenshots have been updated.</p> <p>Section 4.3 Screenshots have been updated.</p> <p>Section 4.4 Screenshots have been updated.</p> <p>Section 4.5 Screenshots have been updated.</p> <p>Section 4.6 New Section has been added.</p> <p>Section 5 Title of section has been updated.</p> <p>Section 5.1 Title of section has been updated. Screenshots have been updated.</p> <p>Section 5.2 New section has been added.</p> <p>Section 5.3 New section has been added.</p> <p>Section 6</p>

Edition	Date	Changes / Comments / Details
		New section has been added.

2 Introduction

2.1 Overview - The Product

Rainbow CTI & Media Bridge works with a number of telephone systems (PBXs). This document describes the configuration and setup of Rainbow CTI and Media Bridge for Mitel Mivoice 250.

Rainbow CTI & Media Bridge is installed on a local physical or virtual machine at customer premises. It connects with Rainbow Server to retrieve the list of extensions and interacts with third-party telephone systems to provide rich telephony experience using ALE Rainbow and Mitel Mivoice 250 desk phone sets.

For other third-party telephony systems, please refer to their respective documentation available at <https://support.openrainbow.com>.

This document is a step-by-step guide for any technical engineer to configure the software.

2.2 Overview - The Guide


The Admin guide comes into effect once the installation is finished and its target audiences are System Administrators. This guide will walk through the administrative steps required for initial configuration and subsequent software maintenance.

The guide begins with an overview along with screenshots of the application to give the reader an understanding of the user interface design.


A “Table of Contents” is provided at the beginning of this guide with hyperlinks for the ease of navigation.

2.3 Architecture Diagram

Rainbow - CTI & Media Bridge



amgo
Behind the Globe - Lucient Enterprise Around the Globe

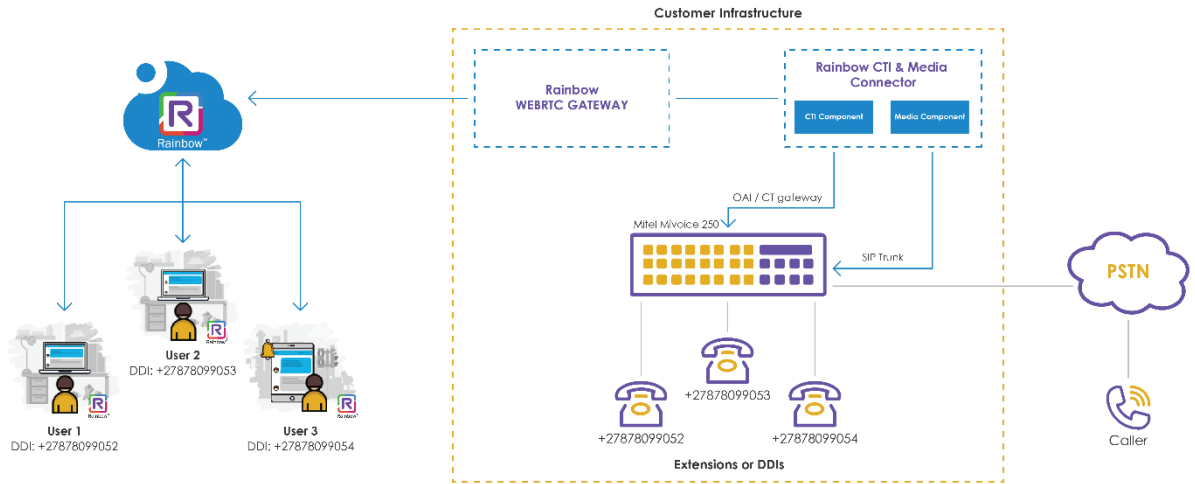


3 Configuration

3.1 Administration - Startup

Launch Rainbow CTI & Media Bridge web administration interface by clicking on the shortcut

icon  on the Windows desktop.

This will display a login screen as shown below:

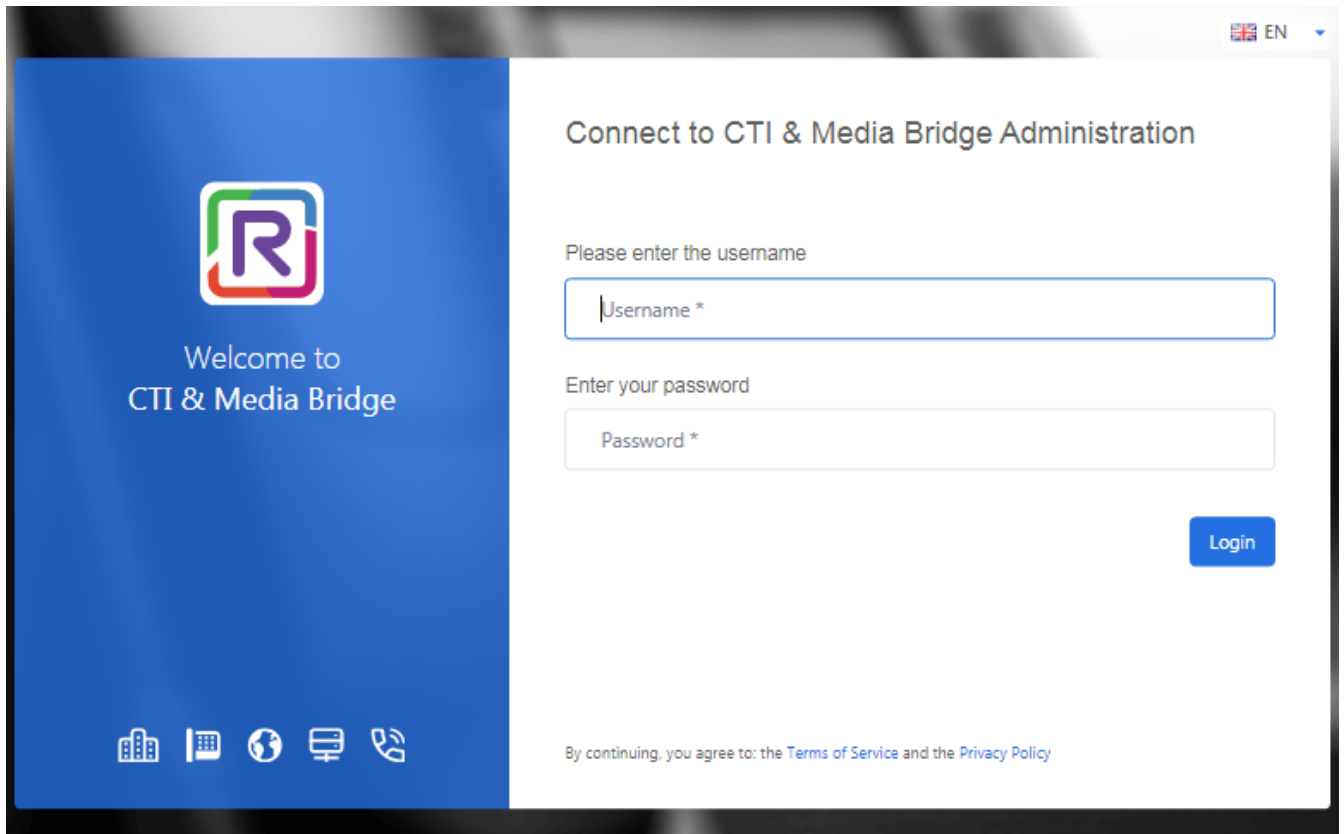

Please enter following credentials when you are logging into the Rainbow CTI & Media Bridge for the first time after installation:

Username: admin

Password: admin


Once logged in, a web interface is displayed that will allow you to navigate around application using the left vertical panel.

The options are grouped under the following categories:

- Control Panel
- Settings
- General

The options can be collapsed and expanded by clicking on the above categories.

There is also a slider control at the bottom that can be used to minimize or maximize the left hand panel.

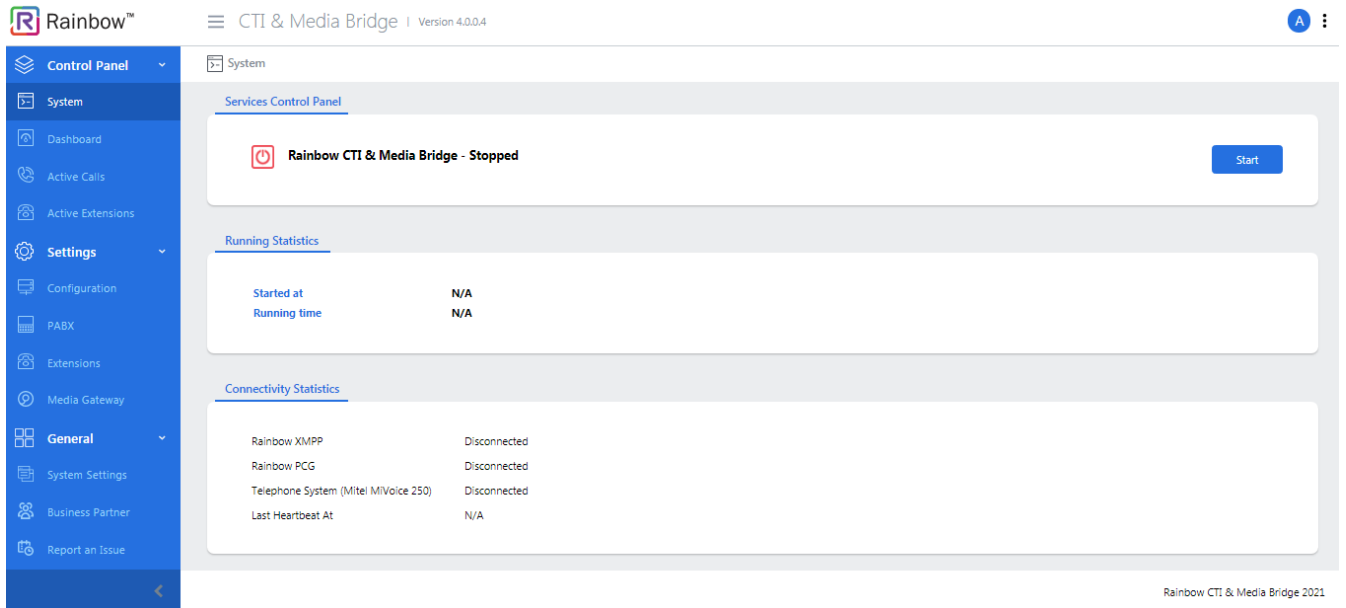


The screenshot shows the Rainbow CTI & Media Bridge administration interface. The left-hand navigation panel is displayed, showing various menu items such as Control Panel, System, Dashboard, Active Calls, Active Extensions, Settings, Configuration, PABX, Extensions, Media Gateway, General, System Settings, Business Partner, and Report an Issue. The main content area displays the 'Services Control Panel' with a 'Rainbow CTI & Media Bridge - Stopped' status and a 'Start' button. Below this are 'Running Statistics' and 'Connectivity Statistics' sections.

Running Statistics	
Started at	N/A
Running time	N/A

Connectivity Statistics	
Rainbow XMPP	Disconnected
Rainbow PCG	Disconnected
Telephone System (Mitel Mivoice 250)	Disconnected
Last Heartbeat At	N/A

Screenshot-Slider Control with Left Hand Panel Displayed

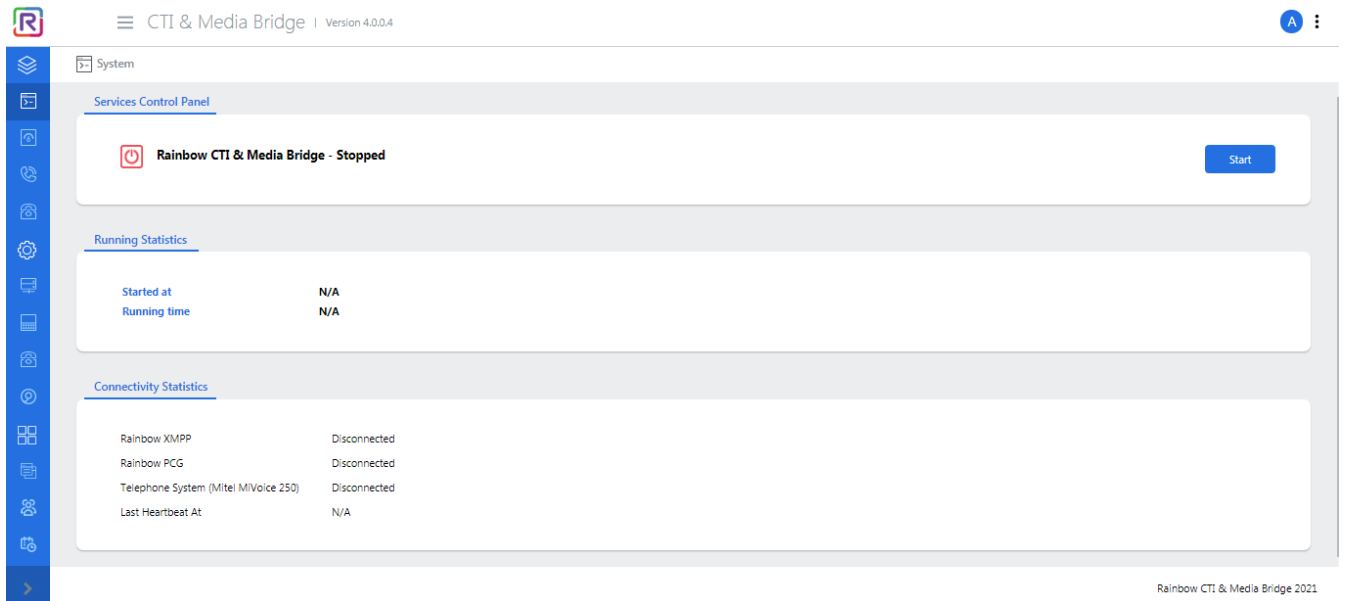


The screenshot shows the Rainbow CTI & Media Bridge administration interface with the left-hand navigation panel hidden. The main content area displays the 'Services Control Panel' with a 'Rainbow CTI & Media Bridge - Stopped' status and a 'Start' button. Below this are 'Running Statistics' and 'Connectivity Statistics' sections.


Running Statistics	
Started at	N/A
Running time	N/A

Connectivity Statistics	
Rainbow XMPP	Disconnected
Rainbow PCG	Disconnected
Telephone System (Mitel Mivoice 250)	Disconnected
Last Heartbeat At	N/A


Screenshot-Slider Control with Left Hand Panel Hidden

Similarly, click on the slider control again to show the left hand panel.


You can also click on  icon next to application title as highlighted below:

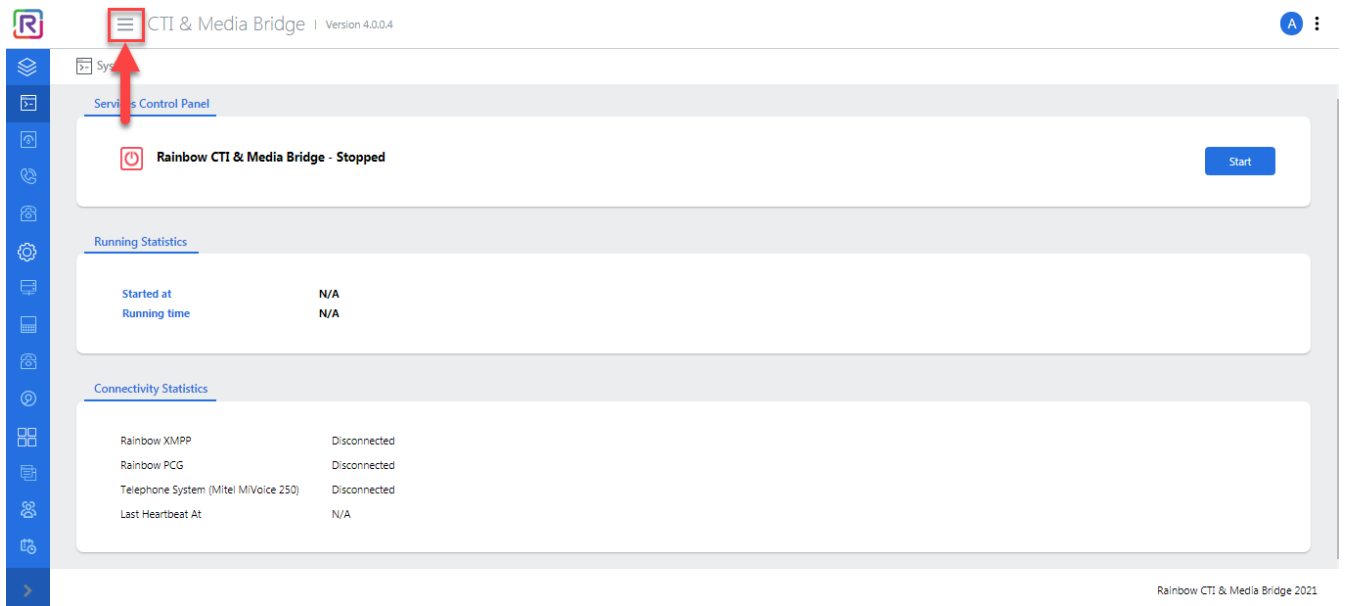

This action will hide the entire left panel as shown below:

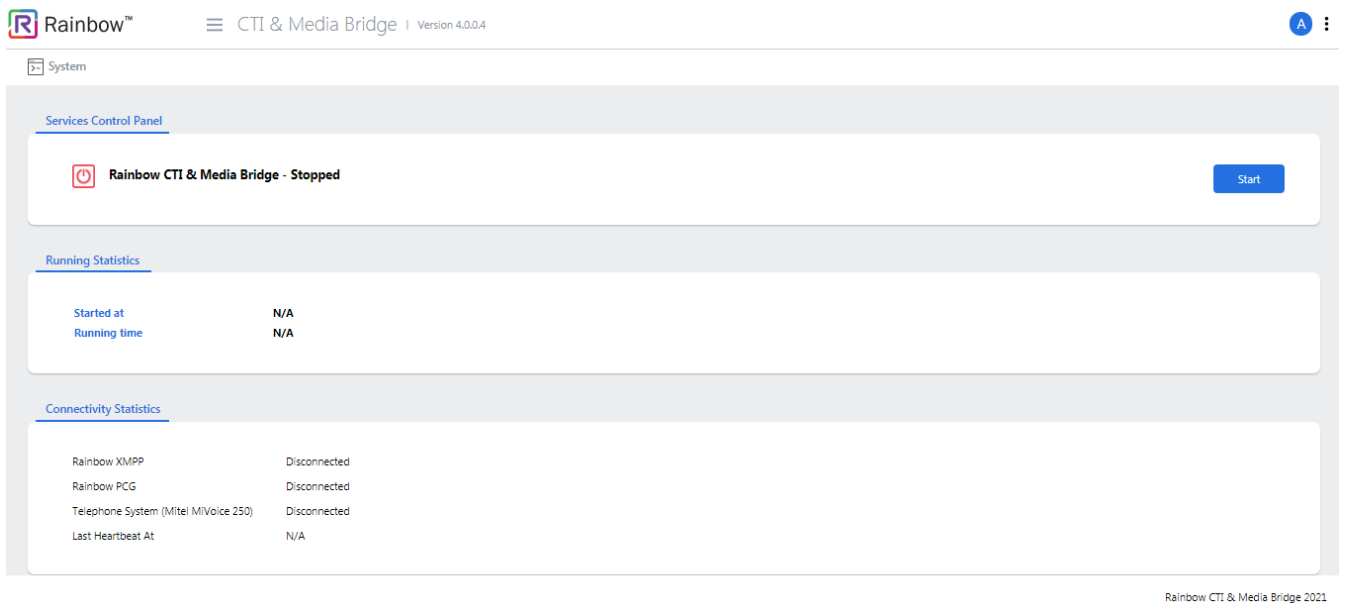

Below is the full view of that left panel:

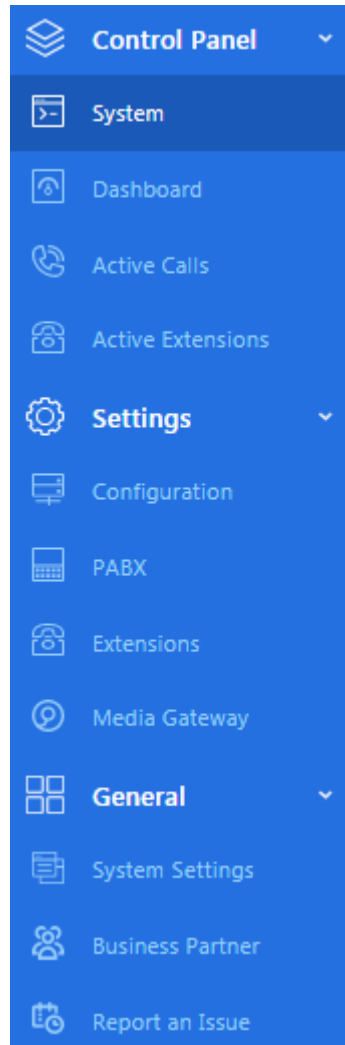

Screenshot - Complete list of links in left menu

For every click on the left menu, the main page to the right will change to the corresponding display. As an administrator, it is your responsibility to provide requisite configuration details in each section and customize the application according to your particular requirements. We recommend that you work on these links, in the following order:

- Configuration
- PABX
- Media Gateway
- System
- System Settings


Once you have provided required information in each section, please click on Update/Save button for that section.

Note: The administration application can also be opened by entering a URL i.e. <http://<IP address>/webAdmin/>.

3.2 Configuration Settings

Rainbow CTI & Media Bridge is required to connect with the main Rainbow Server to enable telephony integration. The configuration settings are entered usually during the first time setup; however, they can be updated at any time, if needed.

Go to configuration page by clicking on the Configuration tab from the left menu, as shown below.

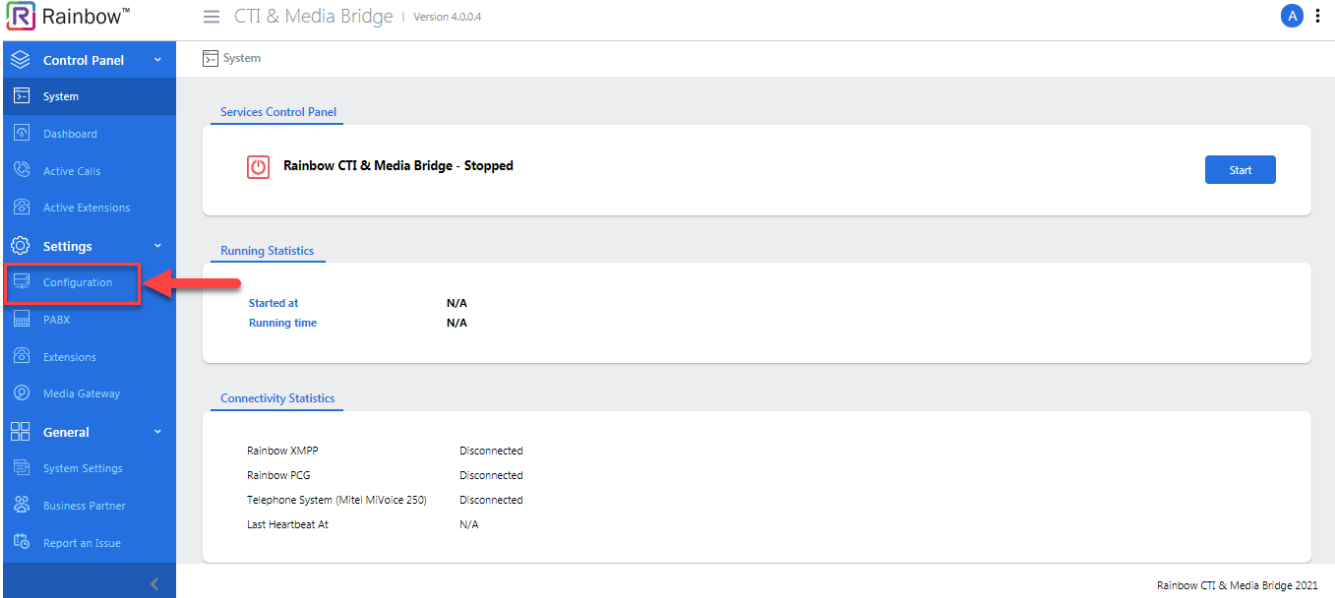


The screenshot shows the Rainbow CTI & Media Bridge administration interface. The left sidebar is expanded to the 'Settings' menu, with the 'Configuration' option highlighted by a red box and a red arrow. The main content area displays the 'System' status, including a 'Services Control Panel' with a 'Rainbow CTI & Media Bridge - Stopped' status and a 'Start' button. Below this are sections for 'Running Statistics' and 'Connectivity Statistics'.

Running Statistics	
Started at	N/A
Running time	N/A

Connectivity Statistics	
Rainbow XMPP	Disconnected
Rainbow PCG	Disconnected
Telephone System (Mitel Mivoice 250)	Disconnected
Last Heartbeat At	N/A

Screenshot-System

You will be presented with the screen, as shown below.

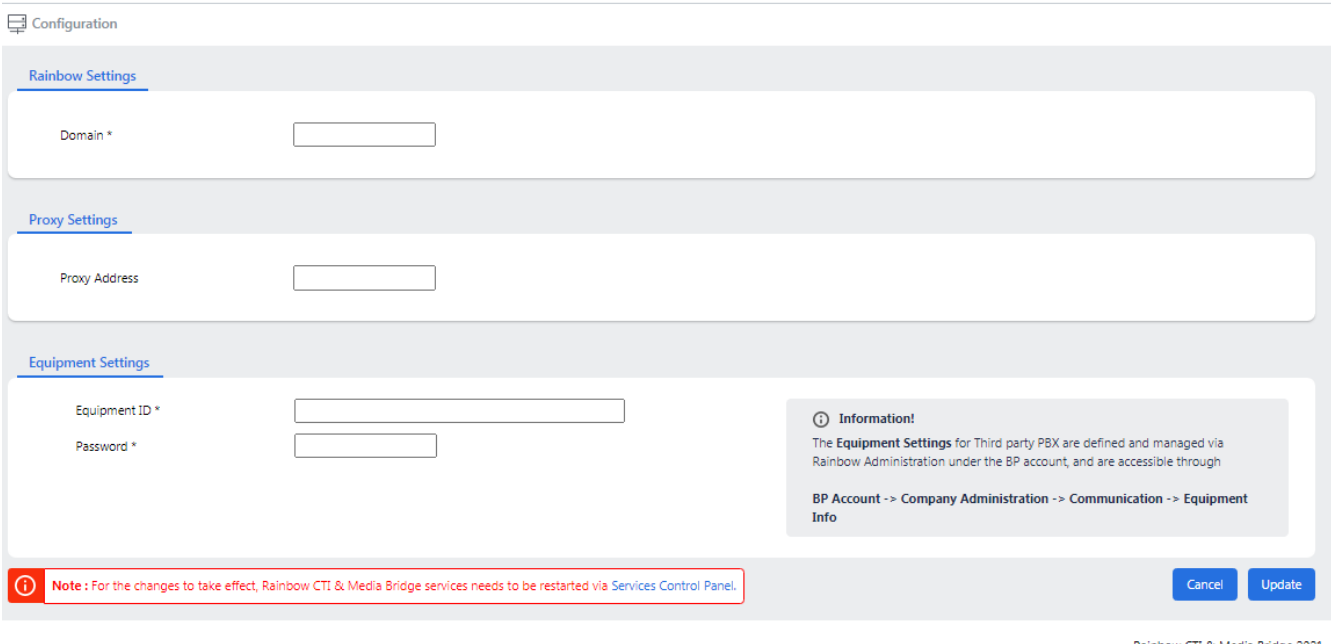

The screenshot shows the Rainbow CTI & Media Bridge configuration page. The page is titled 'Configuration' and contains three sections: 'Rainbow Settings' with a 'Domain *' field, 'Proxy Settings' with a 'Proxy Address' field, and 'Equipment Settings' with 'Equipment ID *' and 'Password *' fields. An information box provides details about third-party PBX settings. A note at the bottom states that changes require a restart of the services.

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Screenshot-Configuration

The relevant page is displayed which has the following main sections.


- **Rainbow Settings**
- **Proxy Settings**
- **Equipment Settings**

A screenshot of each section is illustrated below and a separate explanation for each is written underneath the item.

3.2.1 Rainbow Settings

Rainbow fulfillment team with your company's subscription confirmation will provide these settings. The default value for this section is set to 'openrainbow.com', which is valid for the production sites.

Please enter the provided information accordingly, as shown below for illustration.

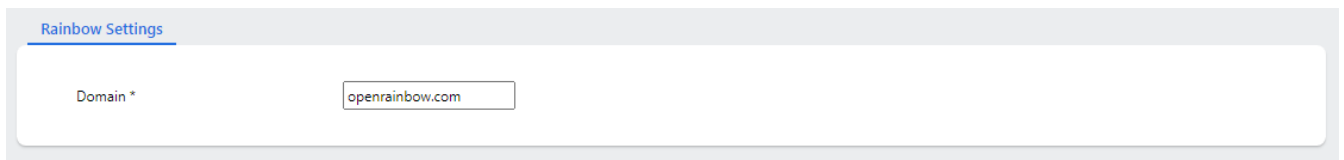


The screenshot shows a form titled "Rainbow Settings". It contains a single input field labeled "Domain *" with the text "openrainbow.com" entered inside the field.

Screenshot-Rainbow Settings

3.2.2 Proxy Settings

If a company has a proxy setup in place for outgoing traffic, the proxy address shall be provided as part of the configuration. It is important to note that this field is optional.

Please enter the provided information accordingly, as shown below for illustration.

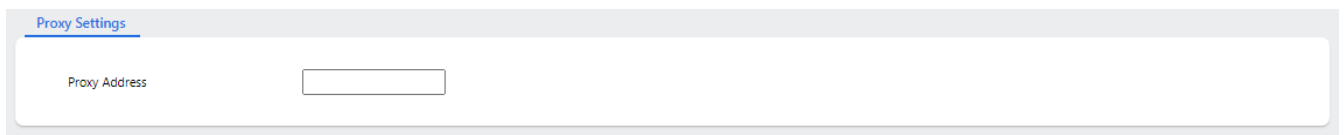


The screenshot shows a form titled "Proxy Settings". It contains a single input field labeled "Proxy Address" which is currently empty.

Screenshot- Proxy Settings

3.2.3 Equipment Settings


Equipment ID is generated by Rainbow system and shall be provided by Rainbow fulfillment team with your company's subscription confirmation.

Please enter the provided information accordingly, as shown below for illustration.

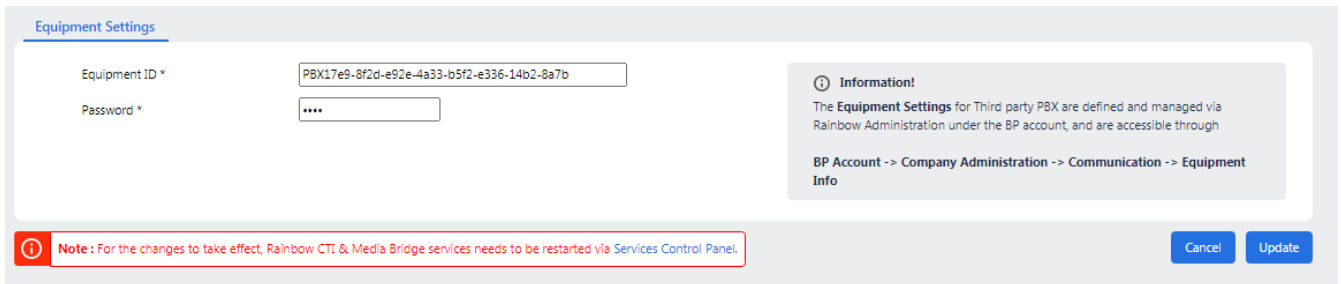

Screenshot- Equipment Settings


Finally, once you have entered the details into each field, click **Update**, as shown below.

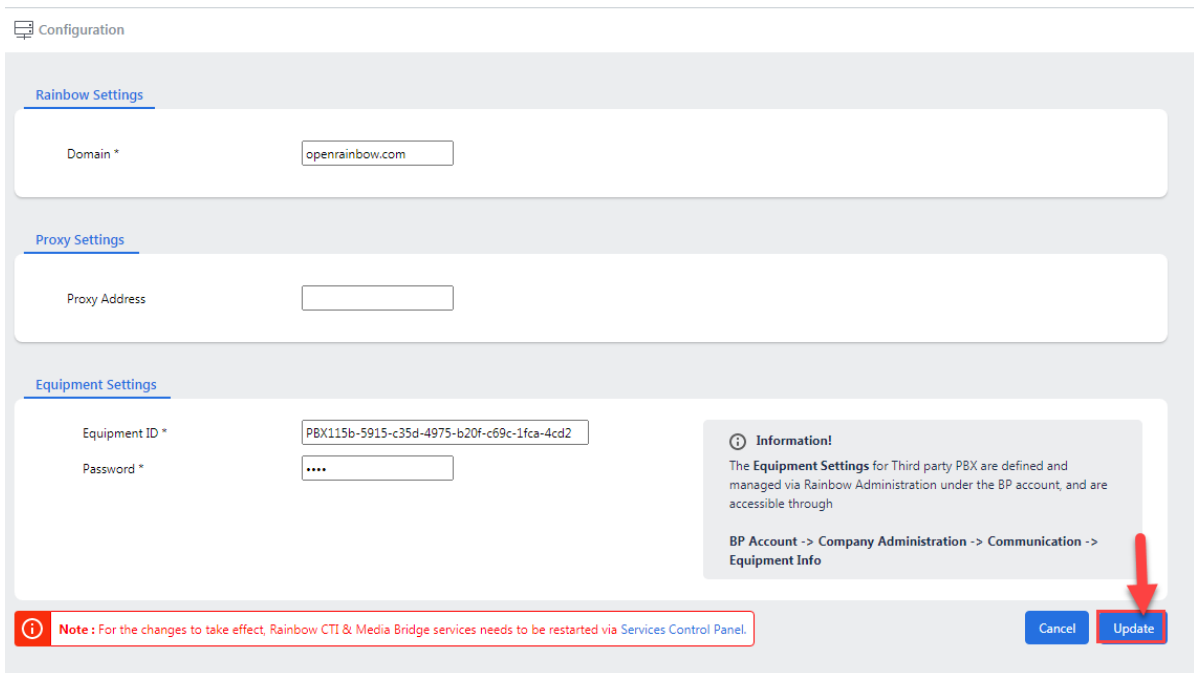

Rainbow CTI & Media Bridge 2021

Screenshot-Configuration

You will be presented with the popup window, click **OK**, as shown below.

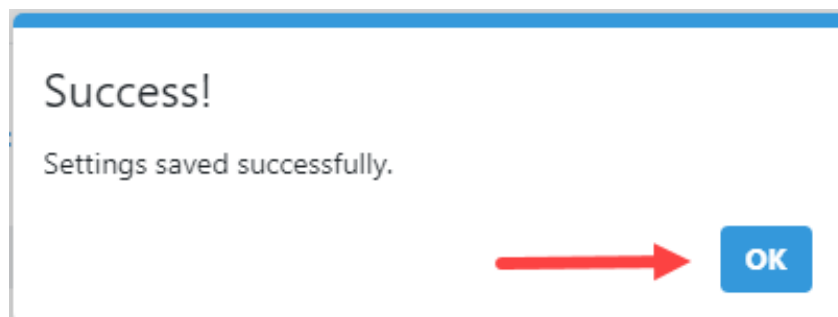


Screenshot-Message from application

NOTE: Once successfully configured, do not change these settings unless advised by Rainbow Support team.

3.3 PABX Settings

Rainbow CTI & Media Bridge is required to connect to Mitel Mivoice 250 telephone system to get phonebook information and also to get telephony events and perform call controls.

Click on the PABX tab from the left menu on the screen, as shown.

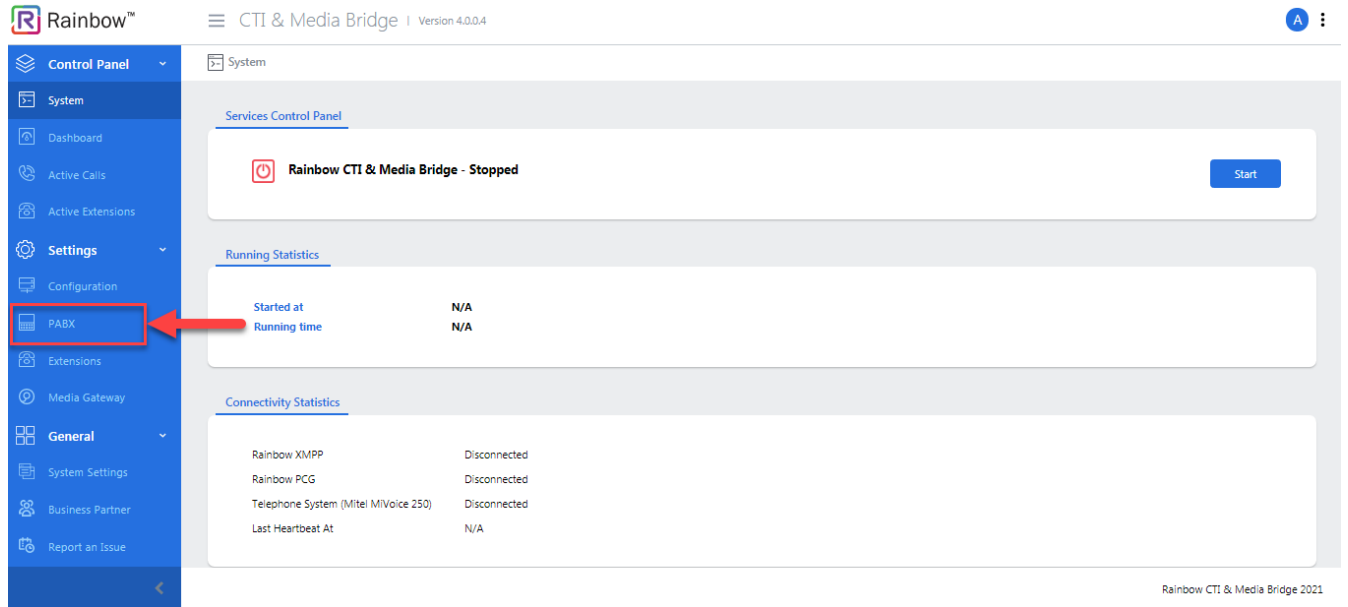

Screenshot- System

You will be presented with the screen, as shown below:

PABX

Connectivity Settings

Friendly Name

OAI Connection Details

Connectivity Type

IP Address

Port

Username

Password

Desk Extension Length

External Outbound Prefix

OAI Connection Details

The OAI settings are required to establish a communication channel with **Mitel MiVoice 250** for call controls and signaling information.

This includes the IP address and port on which OAI services are configured and running in **Mitel MiVoice 250**. Connectivity Type is selected on basis of the topology on which **Mitel MiVoice 250** telephone system(s) are running. Username and password will be required for cases where **Mitel MiVoice 250** requires an authenticated connection to OAI services.

SIP Trunk Settings

Port *

Prefix *

SIP Trunk Setup!

A SIP trunk setup is required between **Mitel MiVoice 250** and **Rainbow CTI & Media Bridge** application. In **Mitel MiVoice 250**, the SIP trunk should have following set of configurations:

- Disable digest authentication
- No authentication enablement
- UDP as transport medium
- Destination address is the machine IP address on which **Rainbow CTI & Media Bridge** application is installed
- 183** Session in progress enablement to provide ringtone to Rainbow users while making outbound calls
- G711 a-law** should be enabled

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via [Services Control Panel](#).

Rainbow CTI & Media Bridge 2021

Screenshot- PABX Settings

The relevant page is displayed which has the following main sections.

- **Connectivity Settings**
- **SIP Trunk Settings**

A screenshot of each section is illustrated below and a separate explanation for each is written underneath the item.

3.3.1 Connectivity Settings

Friendly Name field is usually the name that organization has given to the installed telephone system and it is only for better readability purposes. This becomes particularly useful when there are more than one telephony systems in an organization and in that case only IP addresses do not help the administrators to quickly identify the respective systems.

The default value for this field is set to 'Mitel' but it can be changed.

Connectivity Type, IP Address and Port:

Rainbow CTI and Media Bridge connects with Mitel Mivoice 250 for different types. Please select the connectivity type of the system you have setup in your organization and provide IP and port as well.

Username and Password:

These credentials can be found in Mitel Mivoice 250 user interface. It is important that the provided user is correct setup in Mitel Mivoice 250 for integration to work properly.

Dial Plan Context & Desk Extension Length

Enter your Dial Plan context and the number of characters that an extension will comprise of in these field e.g. if extensions in your organization range between 100-999 then you will select 3 as your desk extension length.

External Outbound Prefix

Enter the prefix that must be affixed with extension when used for external outbound calls.

3.3.2 SIP Trunk Settings

Provide configurations for SIP Trunk setup in this sections that are required for connectivity between Mitel Mivoice 250 and Rainbow CTI & Media Bridge application. Provide SIP Trunk port address and prefix that will be affixed with the extensions operating with SIP Trunk server.

Once you have entered the details into each field, click **Update**, as shown below.

PABX

Connectivity Settings

Friendly Name:

OAI Connection Details

Connectivity Type:

IP Address:

Port:

Username:

Password:

Desk Extension Length:

External Outbound Prefix:

OAI Connection Details

The OAI settings are required to establish a communication channel with **Mitel MiVoice 250** for call controls and signaling information.

This includes the IP address and port on which OAI services are configured and running in **Mitel MiVoice 250**. Connectivity Type is selected on basis of the topology on which **Mitel MiVoice 250** telephone system(s) are running. Username and password will be required for cases where **Mitel MiVoice 250** requires an authenticated connection to OAI services.

SIP Trunk Settings

Port *:

Prefix *:

SIP Trunk Setup!

A SIP trunk setup is required between **Mitel MiVoice 250** and **Rainbow CTI & Media Bridge** application. In **Mitel MiVoice 250**, the SIP trunk should have following set of configurations:


- Disable digest authentication
- No authentication enablement
- UDP as transport medium
- Destination address is the machine IP address on which **Rainbow CTI & Media Bridge** application is installed.
- 183** Session in progress enablement to provide ringtone to Rainbow users while making outbound calls
- G711 a-law** should be enabled

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via [Services Control Panel](#).

Rainbow CTI & Media Bridge 2021

Screenshot-PABX

You will be presented with the popup window, click **OK**, as shown below.

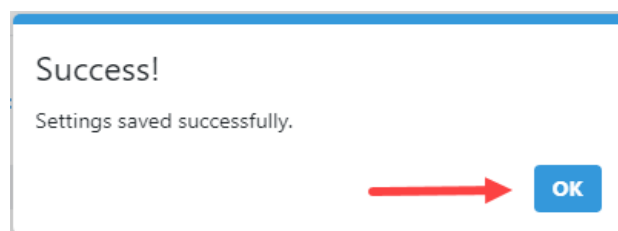

Screenshot-Message from Application

NOTE: Once successfully configured, restart the Rainbow CTI & Media Bridge service for changes to take effect.

3.4 Media Gateway


Rainbow CTI and Media Bridge works as a middleware between Rainbow and ALE WebRTC Gateway so that users (with CTI capability) can receive and take their desk extension (PABX) calls onto their rainbow applications.

It is important that Rainbow WebRTC Gateway is correctly configured before setting up Media Gateway. Media Gateway configuration is necessary if users are setup to receive their business phone calls on their Rainbow applications.

For more detailed information on webRTC Gateway configuration, please check:

<https://support.openrainbow.com/hc/en-us/articles/360019337180-WebRTC-gateway-installation-and-configuration-for-third-party-PBX>

Click on the Media Gateway tab from the left menu on the screen, as shown.

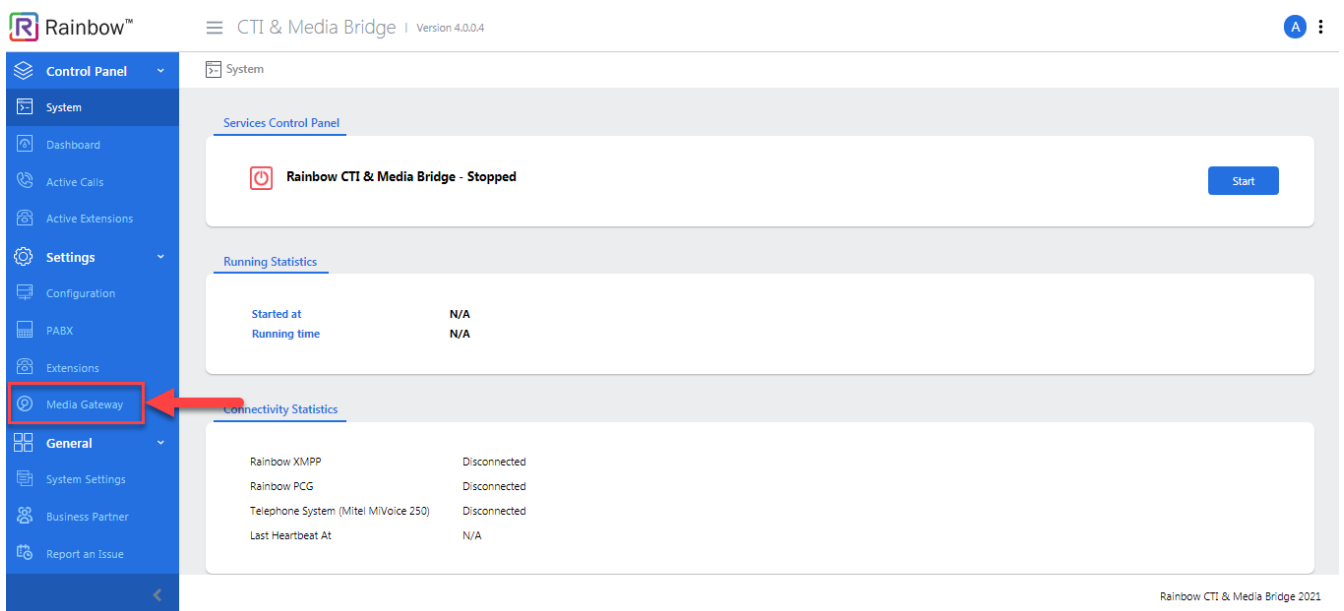

Screenshot-System

You will be presented with the screen, as shown below.

Media Gateway

Media Settings

Media Server IP *

webRTC Gateway

IP *

SIP Port *

Media Setting & webRTC Gateway

Media Server IP is the IP address of the machine on which **Rainbow CTI & Media Bridge** application is installed. This IP address needs to be provided (in the below command) while configuring **webRTC Gateway**.
`mpconfig --PBX_DOMAIN="0.0.0.0"`

Following set of commands can be used to check the configuration and running status for **webRTC Gateway**.

Remote Extensions Numbering Plan

Prefix

Same Prefix configured in PABX

Other Number

Extension Pattern

Desk extension

A random extension of length

Remote Extensions Numbering Plan

Remote Extensions are entities that are managed by **Rainbow CTI & Media Bridge** application to handle calls received from telephone system via SIP trunk. The number pattern for these extensions should not conflict with the numbering plan already defined in **Mitel Mivoice 250**, else the calls will not be transferred to **Rainbow CTI & Media Bridge** application via SIP Trunk.

The number format for remote extensions is divided into two parts. The first part is the prefix for the remote extension number; which can either be the same as the prefix defined while setting up the SIP trunk in **Mitel Mivoice 250** or can be a different custom number. Along with prefix, the second part of remote extension number can either be a random number of selected length, or can be same as

Caller ID policy for VOIP calling

No policy for Caller ID

Set policy for Caller ID

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via [Services Control Panel](#).

Rainbow CTI & Media Bridge 2021

SCREENSHOT - Media Gateway

The relevant page is displayed which has the following main sections.

- **Media Settings**
- **Remote Extensions Numbering Plan**
- **Caller ID Policy for VOIP calling**

3.4.1 Media Settings

Please select the IP address using which the Media Gateway services will be communicating to webRTC Gateway. Also provide the IP address and port on which webRTC Gateway services are running. In most cases, Port will remain the same i.e. 5060 and so only IP address of the webRTC Gateway needs to be provided.

Media Settings

Media Server IP *

webRTC Gateway

IP *

SIP Port *

Media Setting & webRTC Gateway

Media Server IP is the IP address of the machine on which **Rainbow CTI & Media Bridge** application is installed. This IP address needs to be provided (in the below command) while configuring **webRTC Gateway**.
`mpconfig --PBX_DOMAIN="172.20.50.21"`

Following set of commands can be used to check the configuration and running status for **webRTC Gateway**.

SCREENSHOT - Media Gateway Settings

3.4.2 Remote Extensions Numbering Plan


Remote Extensions are entities that are managed by Rainbow CTI & Media Bridge application to handle calls received from telephone system via SIP trunk. Remote Extension Prefix is required so that internal extensions do not conflict with PBX existing dial plan).

Prefix

You can either select the prefix of these remote extensions same as SIP Trunk prefix configured in PABX settings section or you can assign some other prefix by selecting the appropriate option.

Extension Pattern

Select whether you want to use similar extension pattern as opted in PABX settings or do you want to use a random extension length. If you opt for a random extension length, then please do mention the exact length from the drop down next to this option.

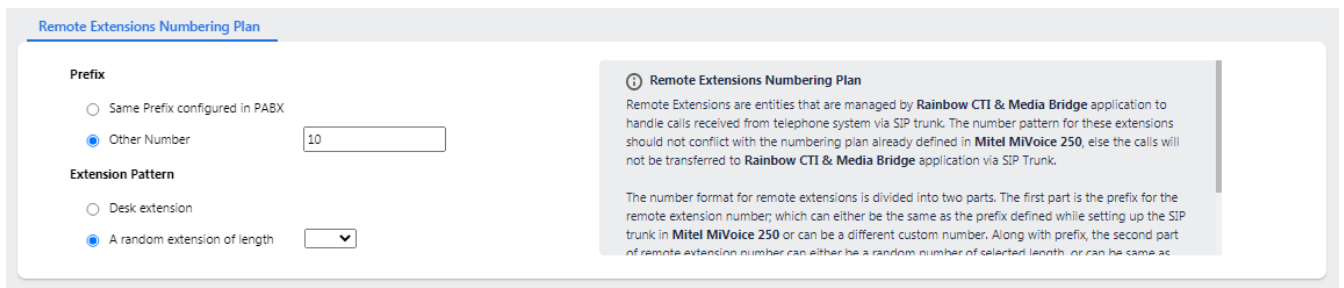

Remote Extensions Numbering Plan

Prefix

Same Prefix configured in PABX

Other Number

Extension Pattern

Desk extension

A random extension of length

Remote Extensions Numbering Plan


Remote Extensions are entities that are managed by **Rainbow CTI & Media Bridge** application to handle calls received from telephone system via SIP trunk. The number pattern for these extensions should not conflict with the numbering plan already defined in **Mitel Mivoice 250**, else the calls will not be transferred to **Rainbow CTI & Media Bridge** application via SIP Trunk.

The number format for remote extensions is divided into two parts. The first part is the prefix for the remote extension number; which can either be the same as the prefix defined while setting up the SIP trunk in **Mitel Mivoice 250** or can be a different custom number. Along with prefix, the second part of remote extension number can either be a random number of selected length, or can be same as

Screenshot-Remote Extensions Numbering Plan Settings

3.4.3 Caller ID Policy for VOIP calling

You can select a particular policy for Caller ID option in this section. Simply opt for first option if you don't want to adopt a policy. If you select the second option, another menu opens up as displayed below:

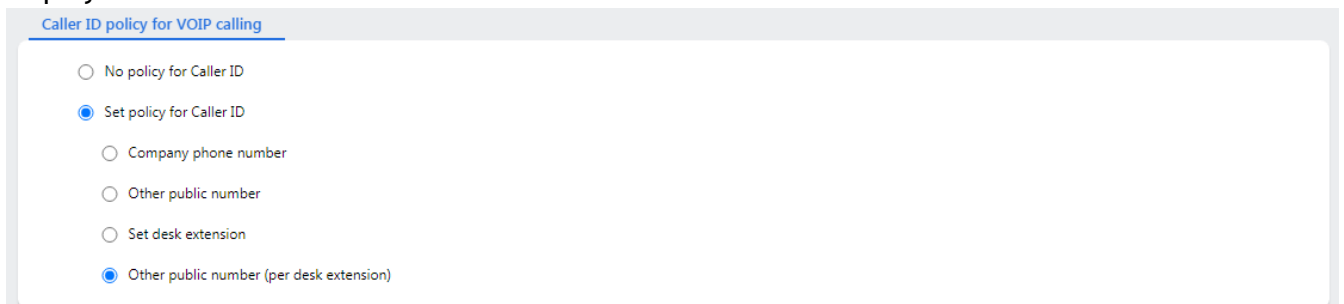

Caller ID policy for VOIP calling

No policy for Caller ID

Set policy for Caller ID

Company phone number

Other public number

Set desk extension

Other public number (per desk extension)

Screenshot-Caller ID Policy for VOIP Calling

Company Phone Number

Enter company phone number that you want to display as caller ID when a call is received on another extension from your extension.

Other Public Number

Enter some random public number that you want to display as caller ID when a call is received on another extension from your extension.


Set Desk extension

Select this option if you want to display your assigned desk extension as caller ID when a call is received on another extension from your extension.

Other Public Number (per desk extension)

Select this option if you want to display some other public number that is assigned as your desk extension as caller ID when a call is received on another extension from your extension.

Once you have entered the details into each field, click **Update**, as shown below.

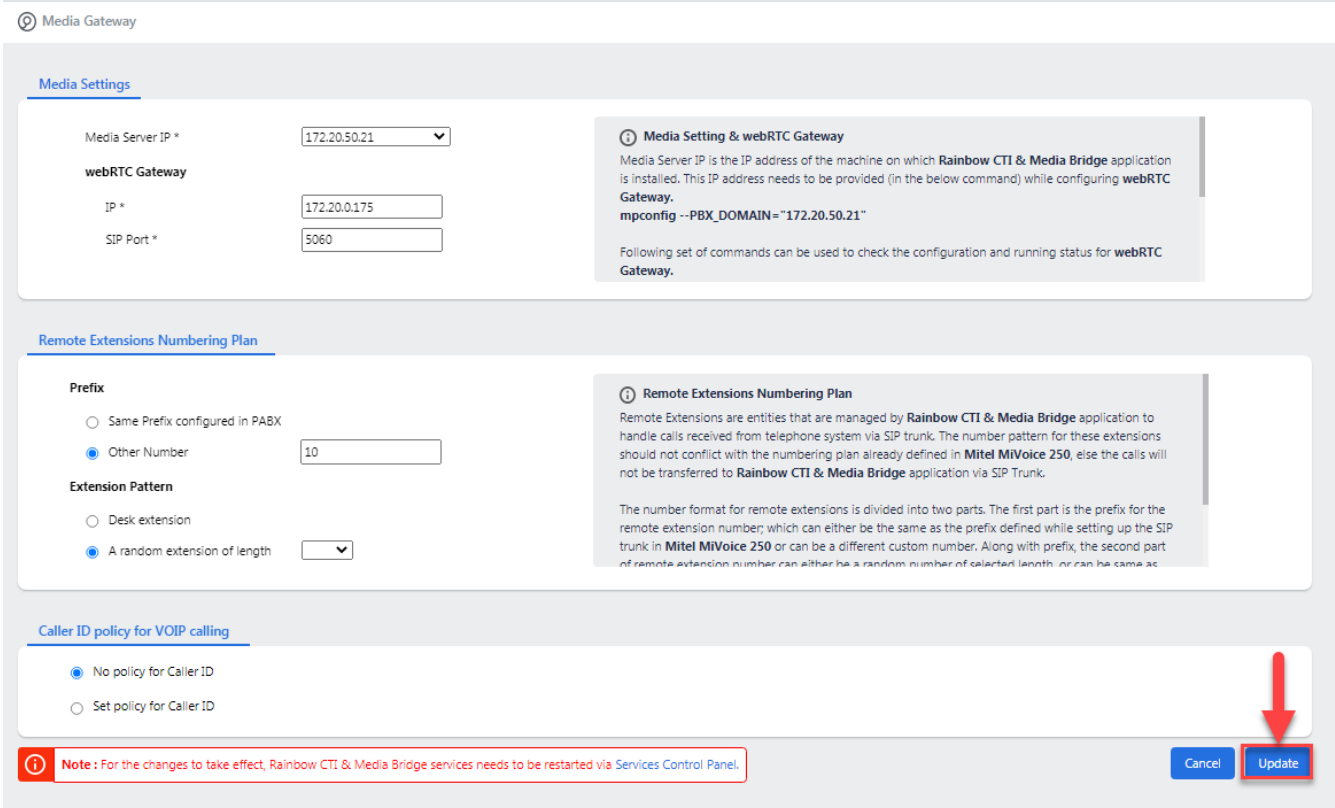

Media Gateway

Media Settings

Media Server IP*

webRTC Gateway

IP*

SIP Port*

Media Setting & webRTC Gateway

Media Server IP is the IP address of the machine on which **Rainbow CTI & Media Bridge** application is installed. This IP address needs to be provided (in the below command) while configuring **webRTC Gateway**.

```
mpconfig --PBX_DOMAIN="172.20.50.21"
```

Following set of commands can be used to check the configuration and running status for **webRTC Gateway**.

Remote Extensions Numbering Plan

Prefix

Same Prefix configured in PABX

Other Number

Extension Pattern

Desk extension

A random extension of length

Remote Extensions Numbering Plan

Remote Extensions are entities that are managed by **Rainbow CTI & Media Bridge** application to handle calls received from telephone system via SIP trunk. The number pattern for these extensions should not conflict with the numbering plan already defined in **Mitel MiVoice 250**, else the calls will not be transferred to **Rainbow CTI & Media Bridge** application via SIP Trunk.

The number format for remote extensions is divided into two parts. The first part is the prefix for the remote extension number; which can either be the same as the prefix defined while setting up the SIP trunk in **Mitel MiVoice 250** or can be a different custom number. Along with prefix, the second part of remote extension number can either be a random number of selected length, or can be same as

Caller ID policy for VOIP calling

No policy for Caller ID


Set policy for Caller ID

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Rainbow CTI & Media Bridge 2021

SCREENSHOT - Media Gateway

You will be presented with the popup window, click **OK**, as shown below.

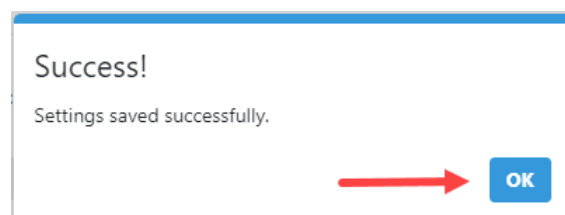


Screenshot-Message from Application

3.5 Starting and Stopping Rainbow CTI & Media Bridge Service

Once the configuration is updated, Rainbow CTI & Media Bridge Service can be started to establish a connection with Rainbow Server.


Go to system screen by clicking on “**System**”, as shown below.

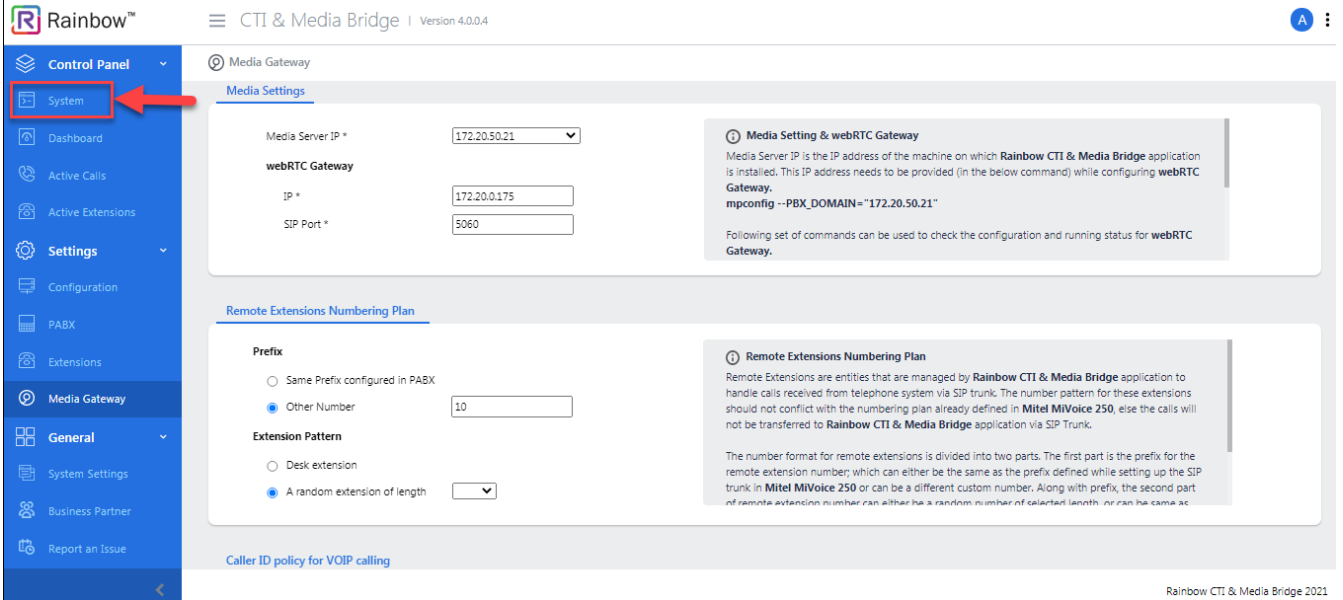

The screenshot shows the Rainbow CTI & Media Bridge administration interface. The left sidebar is expanded to show the 'System' menu item, which is highlighted with a red box and a red arrow. The main content area displays the 'Media Gateway' configuration page. The 'Media Settings' section includes fields for 'Media Server IP' (172.20.50.21), 'webRTC Gateway' IP (172.20.0.175), and 'SIP Port' (5060). The 'Remote Extensions Numbering Plan' section includes a 'Prefix' field (10) and an 'Extension Pattern' dropdown menu (A random extension of length). Informational boxes provide details about 'Media Setting & webRTC Gateway' and 'Remote Extensions Numbering Plan'. The bottom right corner of the interface shows the text 'Rainbow CTI & Media Bridge 2021'.

SCREENSHOT - Media Gateway

The “**System**” screen provides an easy interface to start or stop the service without the need to go to Windows Services Control Manager.

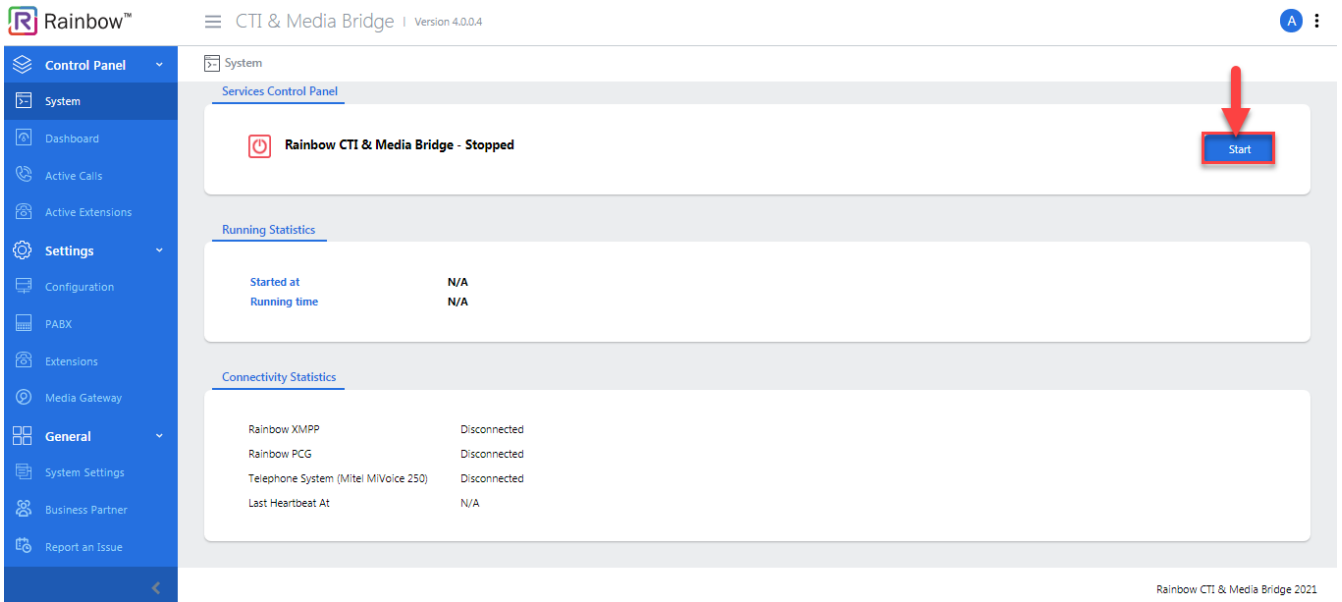

The screenshot shows the Rainbow CTI & Media Bridge administration interface. The left sidebar contains navigation options: Control Panel, System, Dashboard, Active Calls, Active Extensions, Settings (Configuration, PABX, Extensions, Media Gateway), General (System Settings, Business Partner, Report an Issue). The main content area is titled 'System' and 'Services Control Panel'. It displays a red power icon and the text 'Rainbow CTI & Media Bridge - Stopped'. A red arrow points to a blue 'Start' button. Below this are sections for 'Running Statistics' and 'Connectivity Statistics'.

Running Statistics	
Started at	N/A
Running time	N/A

Connectivity Statistics	
Rainbow XMPP	Disconnected
Rainbow PCG	Disconnected
Telephone System (Mitel Mivoice 250)	Disconnected
Last Heartbeat At	N/A


Rainbow CTI & Media Bridge 2021

SCREENSHOT - System

The Service screen displays the status of the Rainbow CTI & Media Bridge service. Using this screen, you can either start or stop the service.

On the left, you will see an LED indicating the current state of the service. A **Green** LED icon indicates that this service is running. A **Red** LED icon indicates that it is stopped. You can find the Stop or Start button on the right. Click that button to either start or stop the service.

The figure below shows the state when Rainbow CTI & Media Bridge service is in running state.

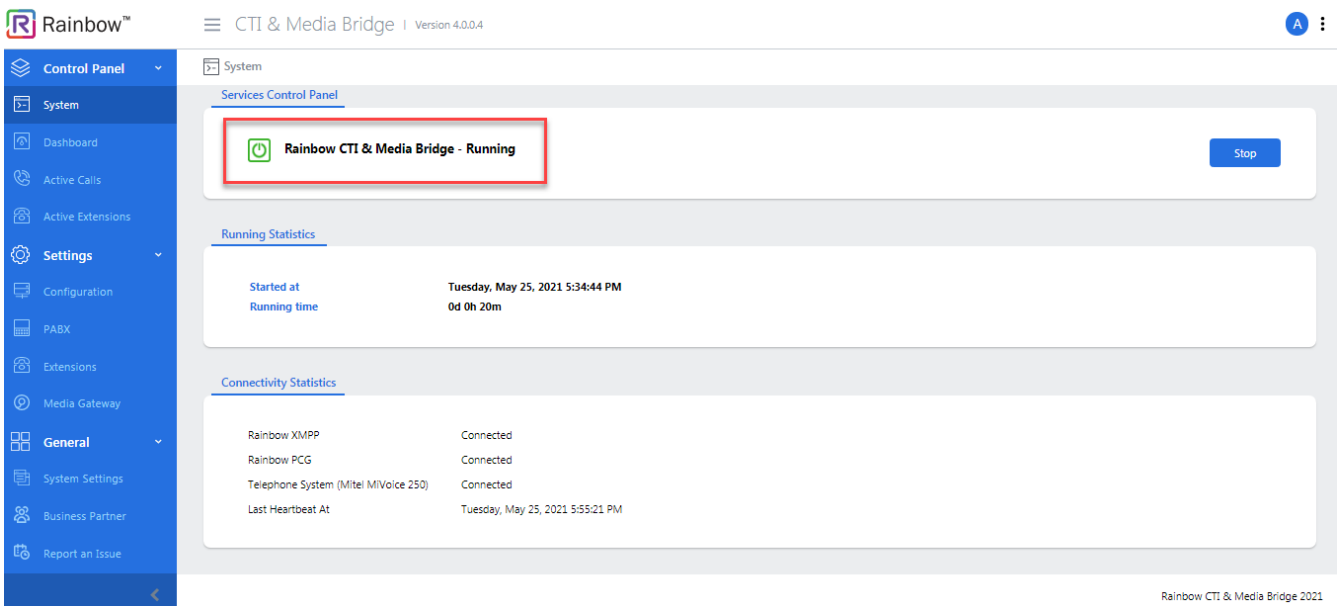

The screenshot shows the Rainbow CTI & Media Bridge administration interface with the service status changed to 'Running'. The left sidebar is the same as in the previous screenshot. The main content area shows a green power icon and the text 'Rainbow CTI & Media Bridge - Running'. A blue 'Stop' button is visible. The 'Running Statistics' and 'Connectivity Statistics' sections are updated.

Running Statistics	
Started at	Tuesday, May 25, 2021 5:34:44 PM
Running time	0d 0h 20m

Connectivity Statistics	
Rainbow XMPP	Connected
Rainbow PCG	Connected
Telephone System (Mitel Mivoice 250)	Connected
Last Heartbeat At	Tuesday, May 25, 2021 5:55:21 PM


Rainbow CTI & Media Bridge 2021

SCREENSHOT - System

4 Calls and Extensions

4.1 Dashboard

Rainbow CTI & Media Bridge has a number of pre-selected statistics such as **CTI Connector connection status**, **Monitored & Un-monitored extensions list** and **On-going Calls**. To view statistics, click on the **Dashboard** from the left menu, as shown below.

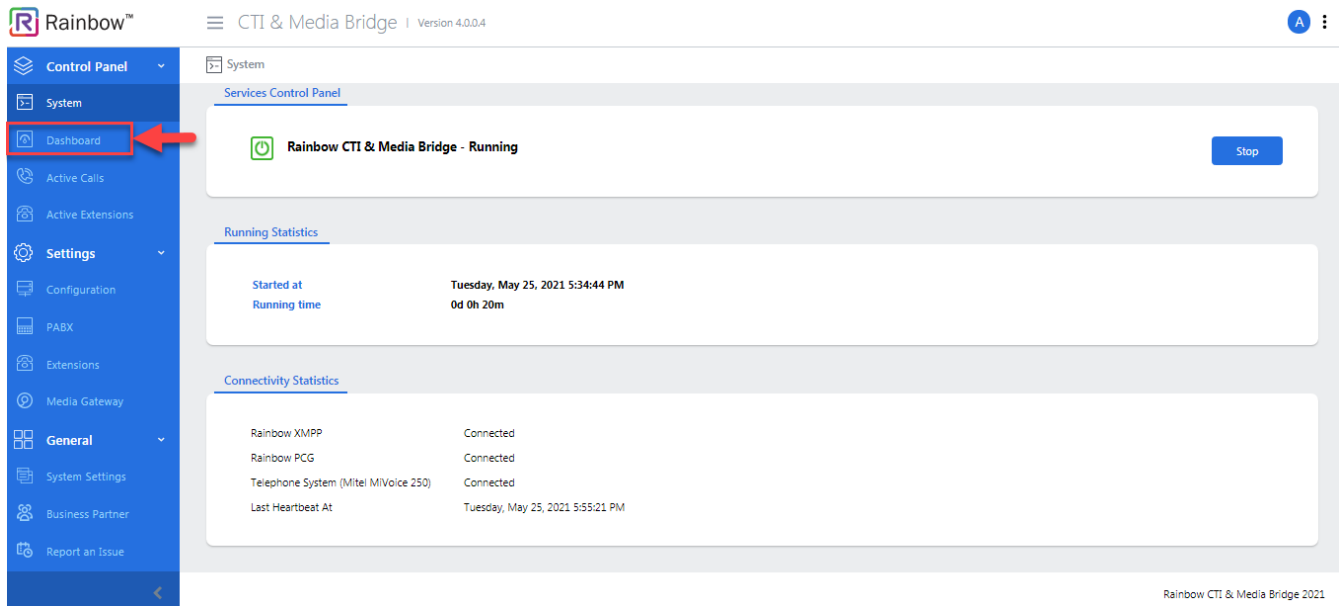


The screenshot displays the Rainbow CTI & Media Bridge administration interface. The left sidebar menu is expanded, and the 'Dashboard' option is highlighted with a red box and a red arrow. The main content area shows the 'System' page with a 'Services Control Panel' section containing a 'Rainbow CTI & Media Bridge - Running' status with a 'Stop' button. Below this are sections for 'Running Statistics' and 'Connectivity Statistics'.

Running Statistics	
Started at	Tuesday, May 25, 2021 5:34:44 PM
Running time	0d 0h 20m

Connectivity Statistics	
Rainbow XMPP	Connected
Rainbow PCG	Connected
Telephone System (Mitel Mivoice 250)	Connected
Last Heartbeat At	Tuesday, May 25, 2021 5:55:21 PM

SCREENSHOT - System

You will be presented with the screen, as shown below.

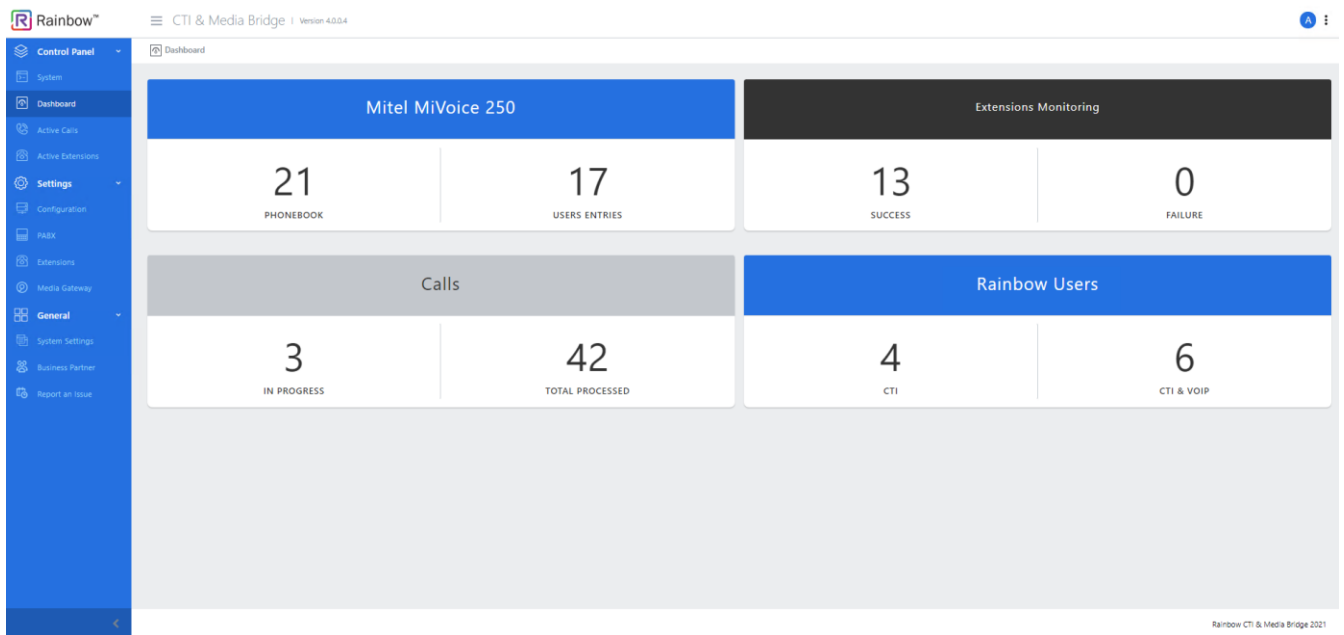


Screenshot-Dashboard

The dashboard tab provides wealth of information that can fast track troubleshooting.

4.2 Extensions & User Entries


Rainbow CTI & Media Bridge retrieves the list of total extensions/users entries available in Mitel Mivoice 250 PBX and sends that information to Rainbow Server. This information is then made available in Rainbow Enterprise configuration.

If you want to see the list of telephone extensions/Users entries, click on the **PHONEBOOK**, as shown below.

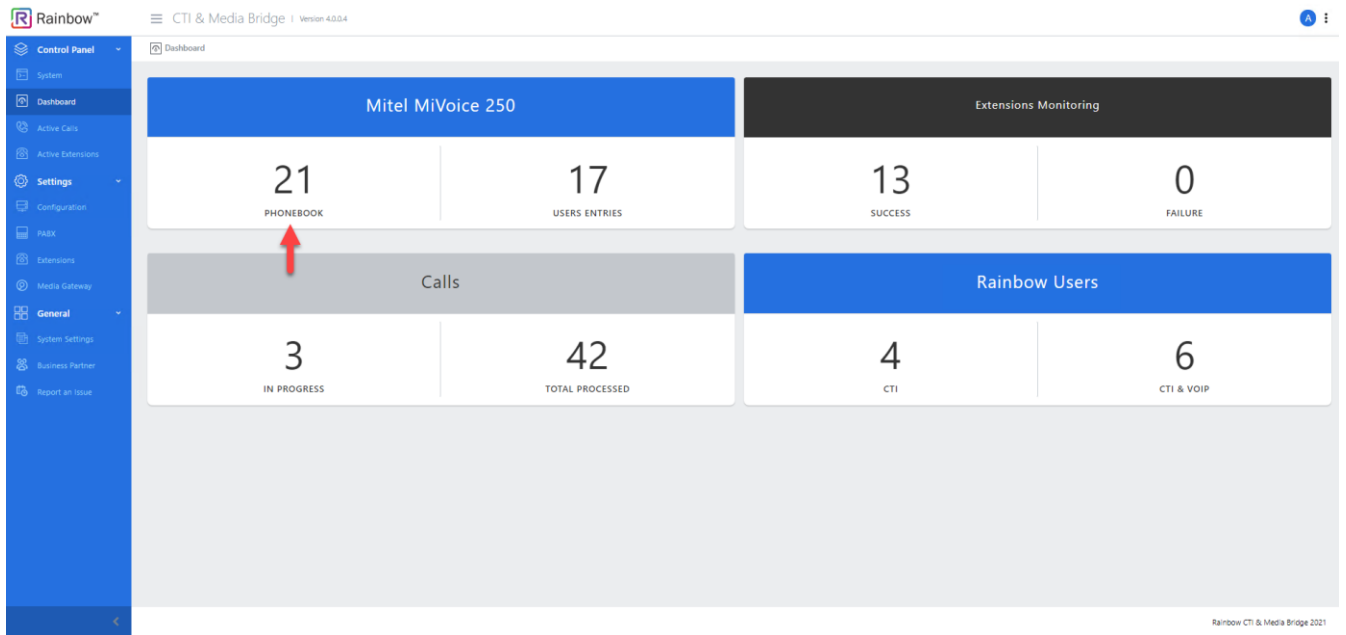


Screenshot-Dashboard

You will be presented with the screen, as shown below

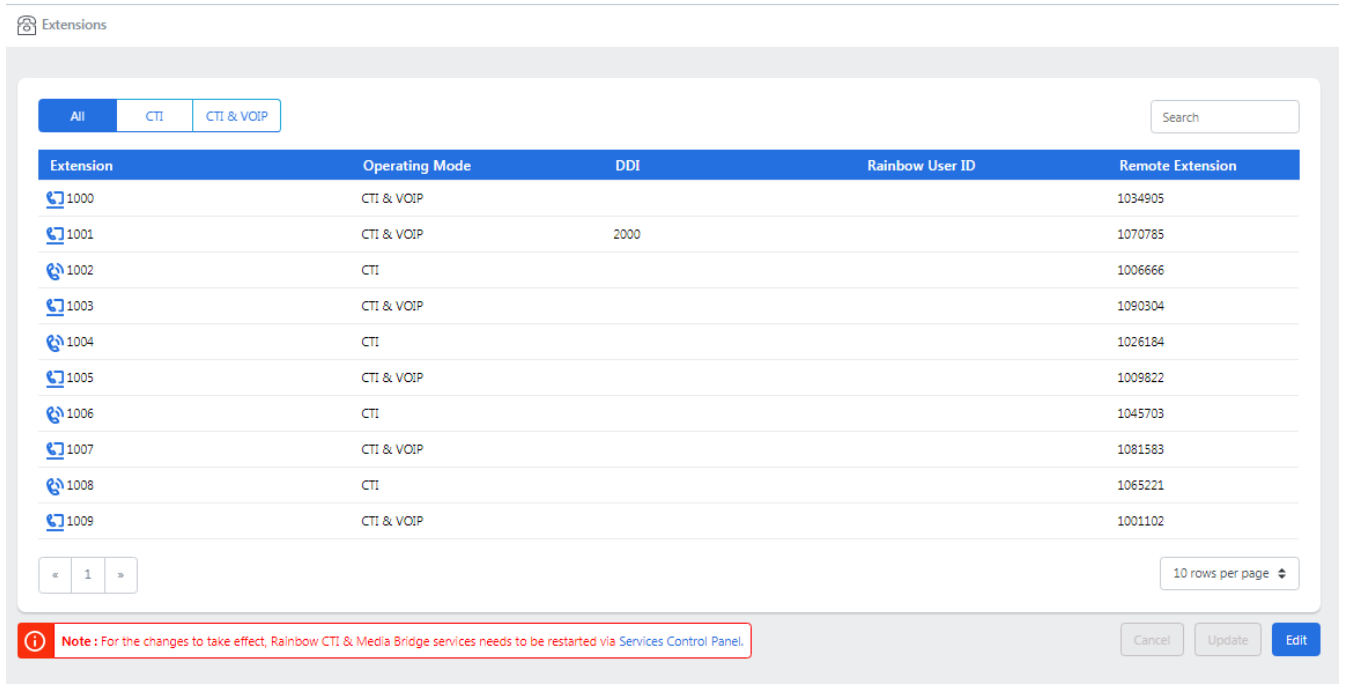


Screenshot- Extensions

You can also go to extensions screen by clicking on the Extensions tab from the left menu, as shown.

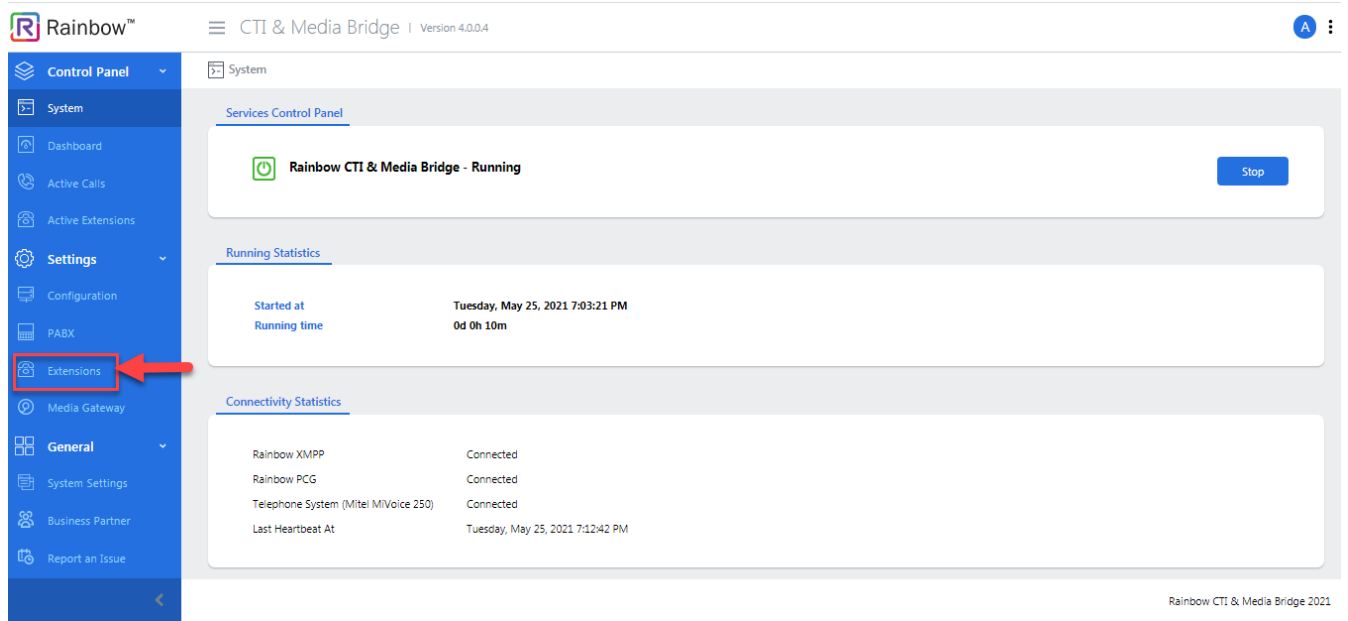

Screenshot- System

You will be presented with the screen, as shown below

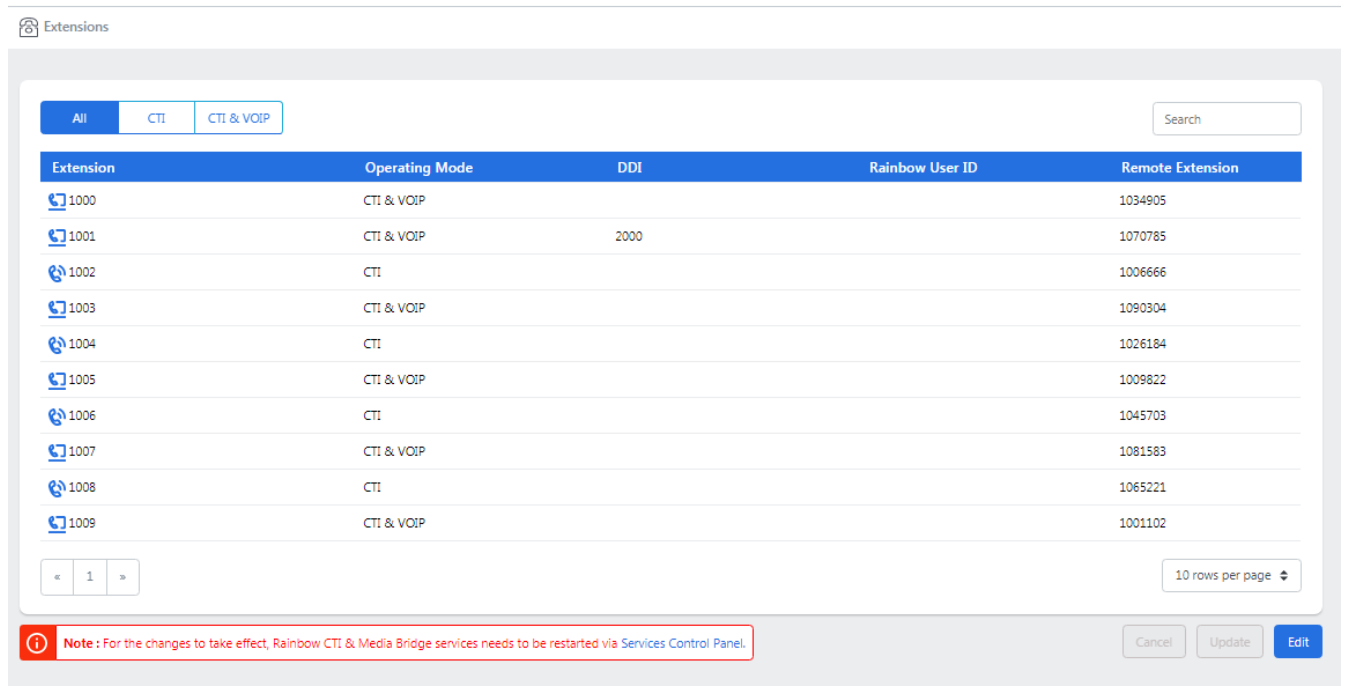


Screenshot- Extensions

4.2.1 CTI & VOIP

VOIP introduces a routing menu Other Number in the Rainbow application to forward the PBX calls to a second extension configured with an external or internal number. It is based on Virtual Extension device on the Media Gateway.

Note: Every new extension will have CTI & VOIP set as operating mode.

If you want to handle any specific desk extension (PABX) call onto rainbow interface both in terms of signaling and voice then select CTI option from the drop down menu after clicking on **Edit** button. Once you have set the options, click **Update** as shown below:

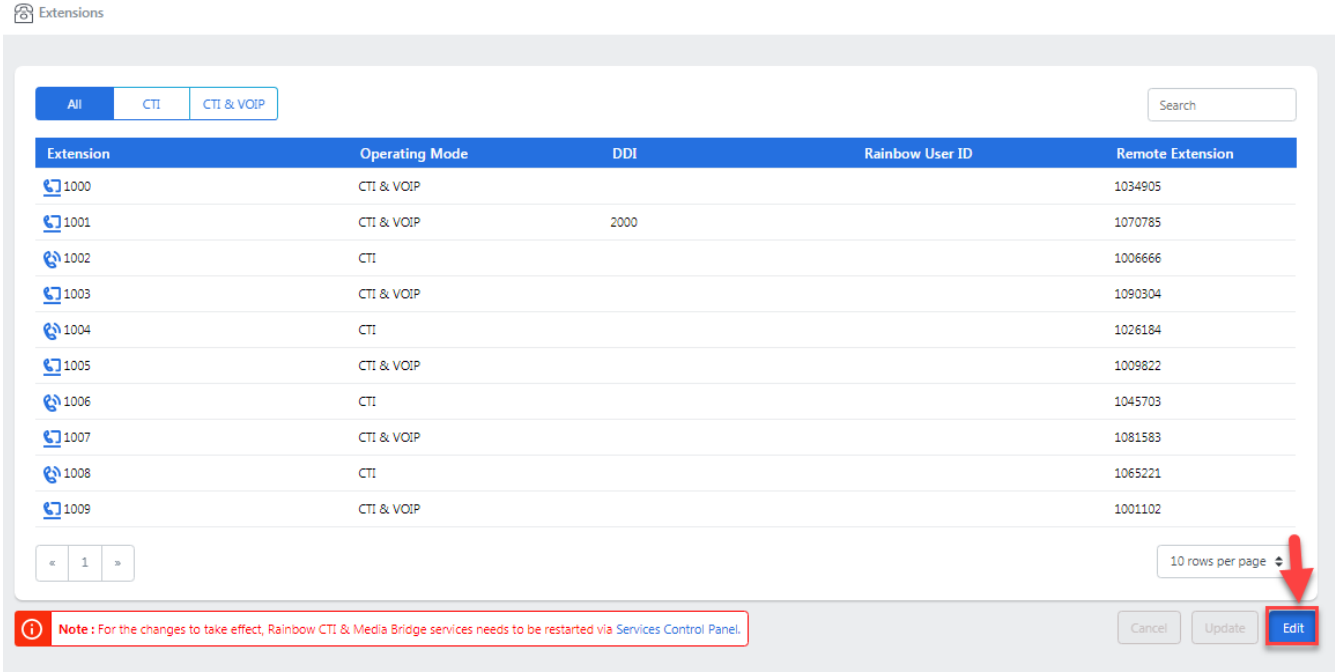

Extensions

All CTI CTI & VOIP Search

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1000	CTI & VOIP			1034905
1001	CTI & VOIP	2000		1070765
1002	CTI			1006666
1003	CTI & VOIP			1090304
1004	CTI			1026184
1005	CTI & VOIP			1009822
1006	CTI			1045703
1007	CTI & VOIP			1081583
1008	CTI			1065221
1009	CTI & VOIP			1001102

< 1 >

10 rows per page

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Cancel Update **Edit**

Rainbow CTI & Media Bridge 2021

Screenshot - Edit Button on Extensions Page

Extensions

All CTI CTI & VOIP

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1000	CTI & VOIP	<input type="text"/>		1034905
1001	CTI & VOIP	2000		1070785
1002	CTI & VOIP	<input type="text"/>		1006666
1003	CTI & VOIP	<input type="text"/>		1090304
1004	CTI	<input type="text"/>		1026184
1005	CTI & VOIP	<input type="text"/>		1009822
1006	CTI	<input type="text"/>		1045703
1007	CTI & VOIP	<input type="text"/>		1081583
1008	CTI	<input type="text"/>		1065221
1009	CTI & VOIP	<input type="text"/>		1001102

Screenshot - Updating Operating Mode of an Extension

Extensions

All CTI CTI & VOIP

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1000	CTI & VOIP	<input type="text"/>		1034905
1001	CTI & VOIP	2000		1070785
1002	CTI	<input type="text"/>		1006666
1003	CTI & VOIP	<input type="text"/>		1090304
1004	CTI	<input type="text"/>		1026184
1005	CTI & VOIP	<input type="text"/>		1009822
1006	CTI	<input type="text"/>		1045703
1007	CTI & VOIP	<input type="text"/>		1081583
1008	CTI	<input type="text"/>		1065221
1009	CTI & VOIP	<input type="text"/>		1001102

< 1 > 10 rows per page


Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Cancel **Update** Edit

Rainbow CTI & Media Bridge 2021

Screenshot-Updating Extensions

You will be presented with the popup window, click **OK**, as shown below.

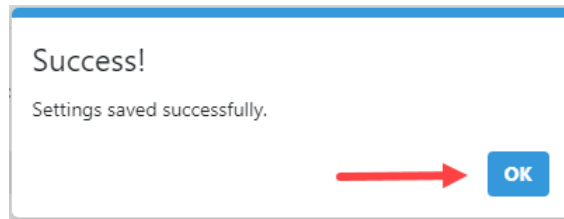

Screenshot-Message from Application

While updating the Operating Mode of added extensions, you can also set DDI information for these extensions. If Operating Mode is set as **CTI & VOIP** then DDI information can be manually added and if operating mode is set as CTI, then DDI information cannot be altered and the value stored in CTI & VOIP mode is stored in the extension as shown below:

Extensions

All CTI CTI & VOIP

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1000	CTI & VOIP	<input type="text"/>		1034905
1001	CTI & VOIP	2000		1070785
1002	CTI	<input type="text"/>		1006666
1003	CTI & VOIP	<input type="text"/>		1090304
1004	CTI	<input type="text"/>		1026184
1005	CTI & VOIP	<input type="text"/>		1009822
1006	CTI	<input type="text"/>		1045703
1007	CTI & VOIP	<input type="text"/>		1081583
1008	CTI	<input type="text"/>		1065221
1009	CTI & VOIP	<input type="text"/>		1001102

< 1 > 10 rows per page

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel. Cancel Update Edit


Rainbow CTI & Media Bridge 2021

Screenshot-Extensions

4.3 Monitored Extensions


Once necessary configuration is done in Rainbow Enterprise configuration, the information of telephone extensions that need to be monitored is sent to CTI & Media Bridge. The “Monitored Extensions” shows the total number of extensions that are successfully registered for monitoring by CTI & Media Bridge.

If you want to see the list of telephone extensions monitored, click on the SUCCESS from **Extension Monitoring** widget, as shown below.

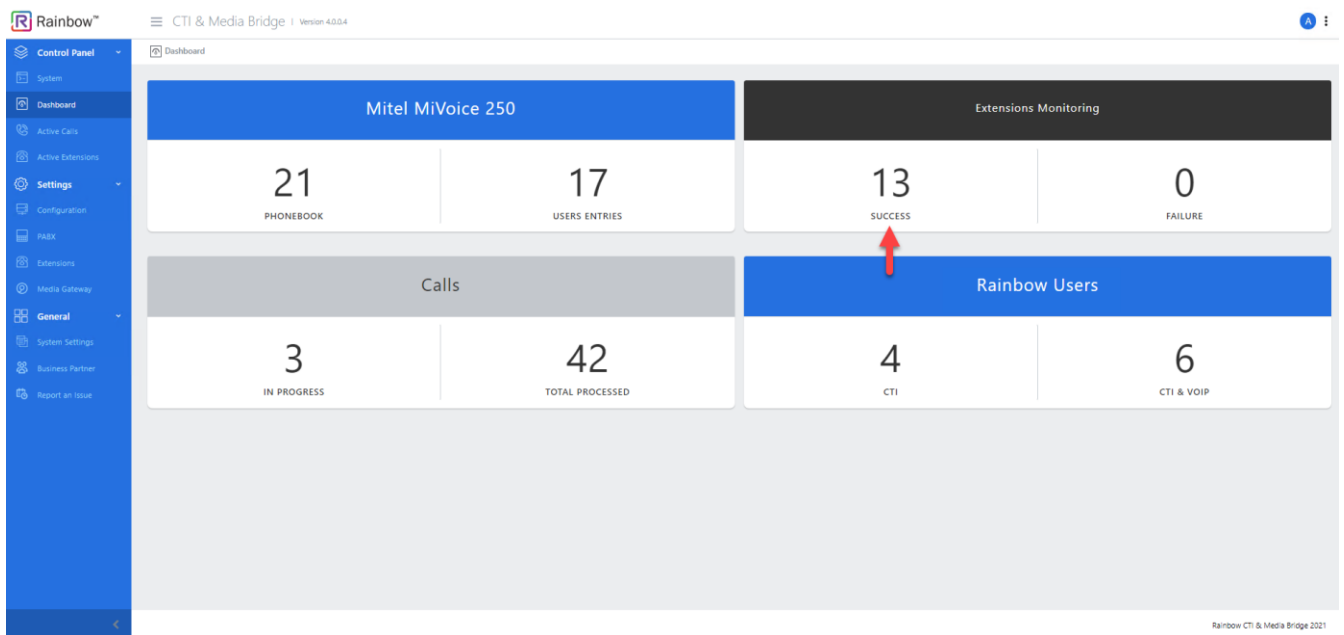

Screenshot-Dashboard


You will be presented with the screen, as shown below

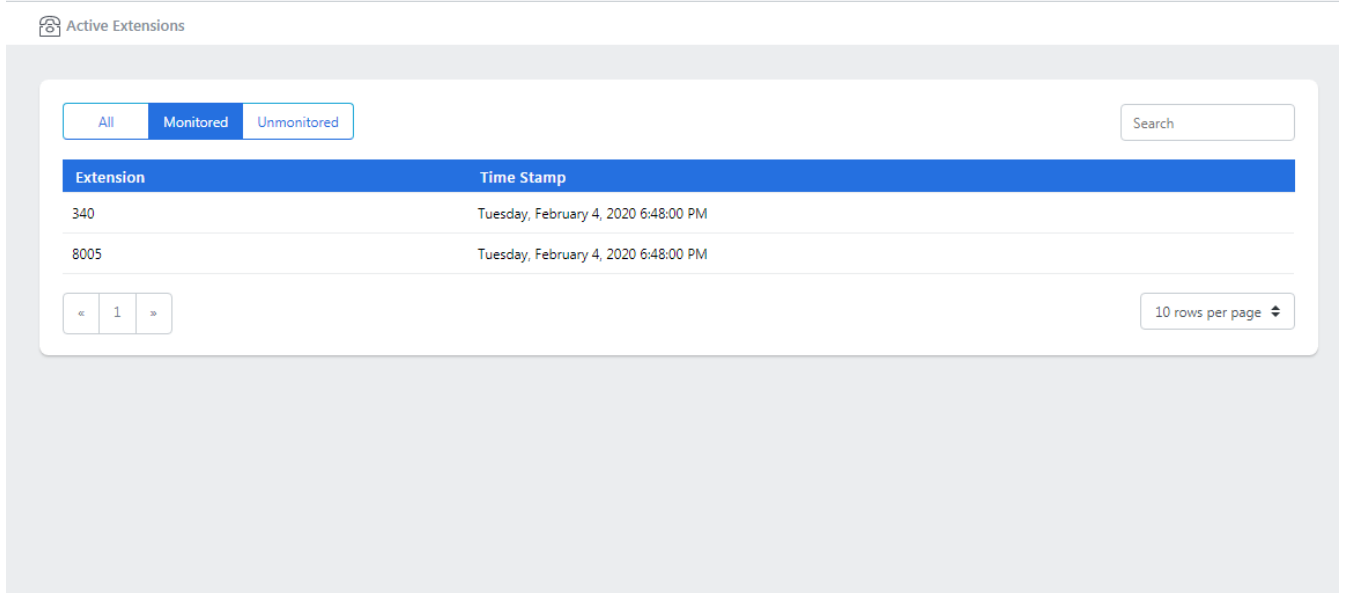

Rainbow CTI & Media Bridge 2021


Screenshot-Monitored Extensions

You can also go to statistics screen by clicking on the Active Extension tab from the left menu, as shown.

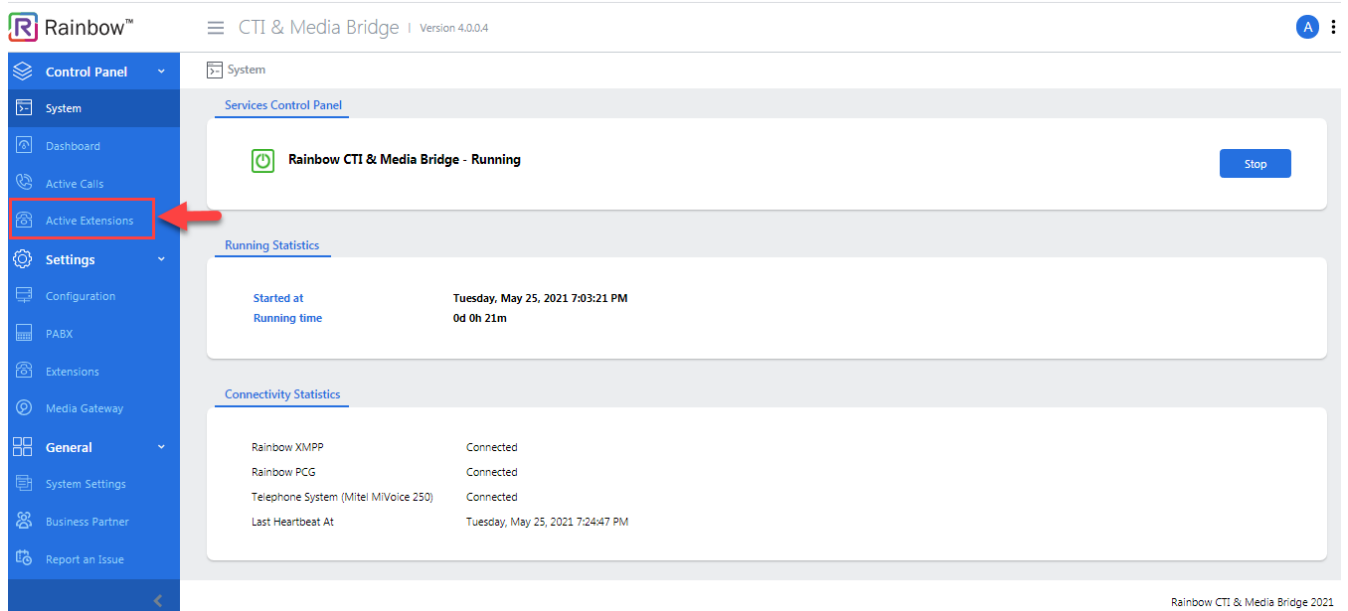

Screenshot-System

You will be presented with the list of all both monitored and unmonitored extensions, as shown below:

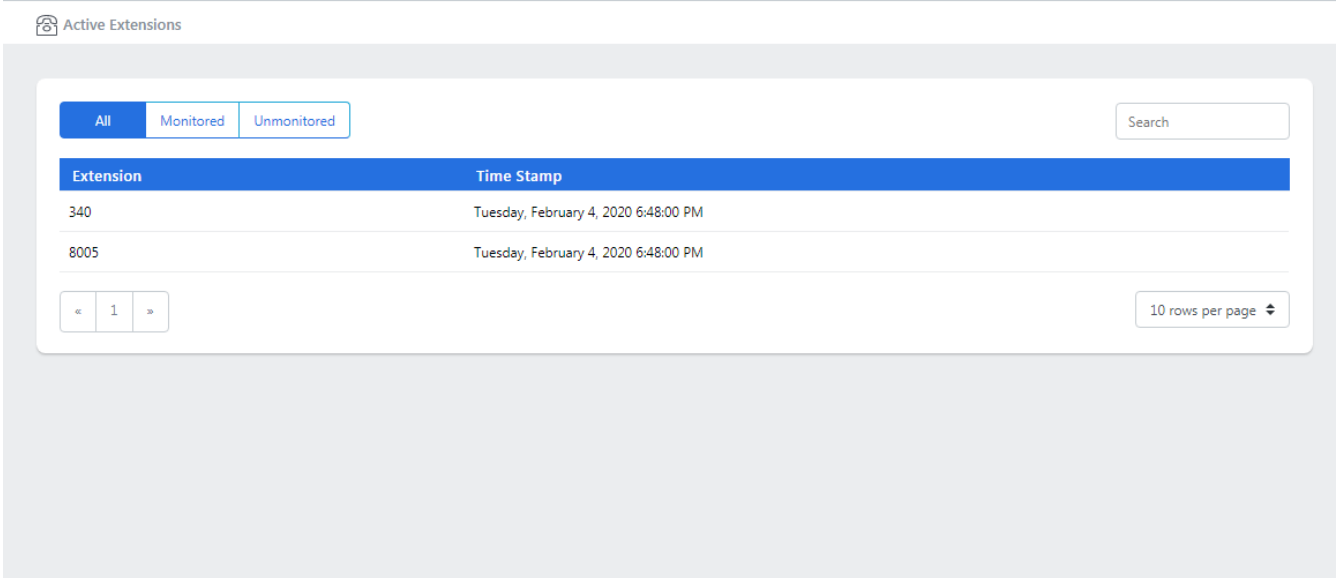


The screenshot shows the 'Active Extensions' page. At the top left, there is a home icon and the text 'Active Extensions'. Below this, there are three tabs: 'All', 'Monitored', and 'Unmonitored'. A search box is located to the right of the tabs. The main content is a table with two columns: 'Extension' and 'Time Stamp'. The table contains two rows of data. At the bottom left, there are navigation arrows and the number '1'. At the bottom right, there is a dropdown menu set to '10 rows per page'.

Extension	Time Stamp
340	Tuesday, February 4, 2020 6:48:00 PM
8005	Tuesday, February 4, 2020 6:48:00 PM

Rainbow CTI & Media Bridge 2021

Screenshot-Active Extensions

Click on the Monitored tab from top menu, as shown below.

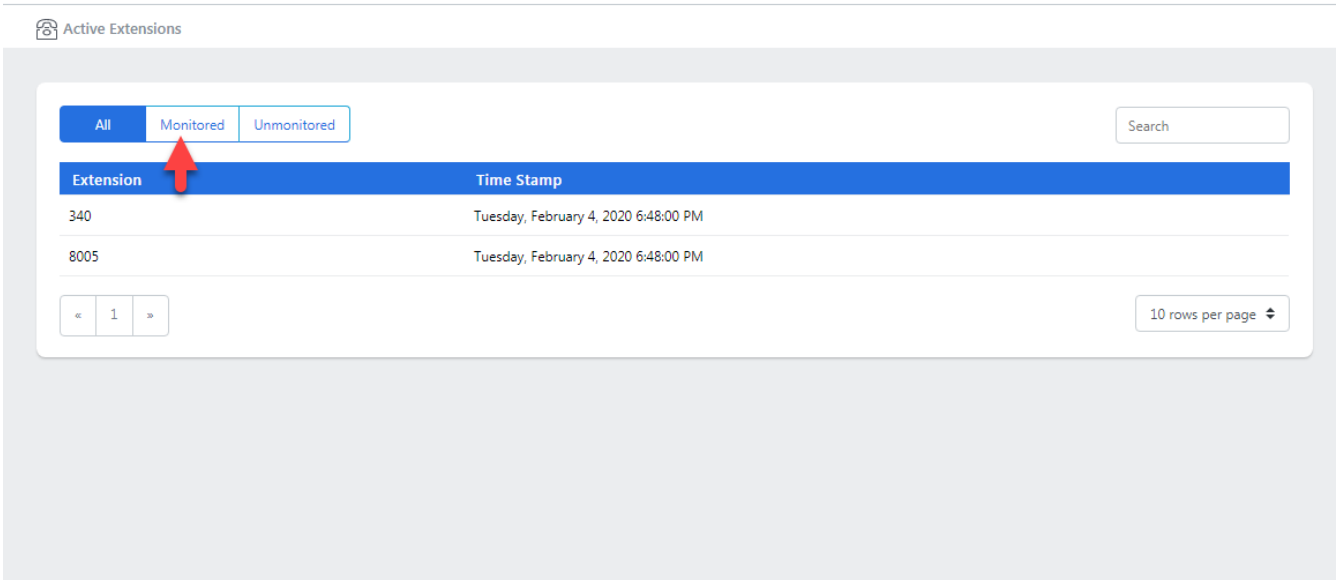


This screenshot is identical to the previous one, but with a red arrow pointing to the 'Monitored' tab in the top navigation menu.

Extension	Time Stamp
340	Tuesday, February 4, 2020 6:48:00 PM
8005	Tuesday, February 4, 2020 6:48:00 PM

Rainbow CTI & Media Bridge 2021

Screenshot-Active Extensions

You will be presented with the monitored extensions, as shown below

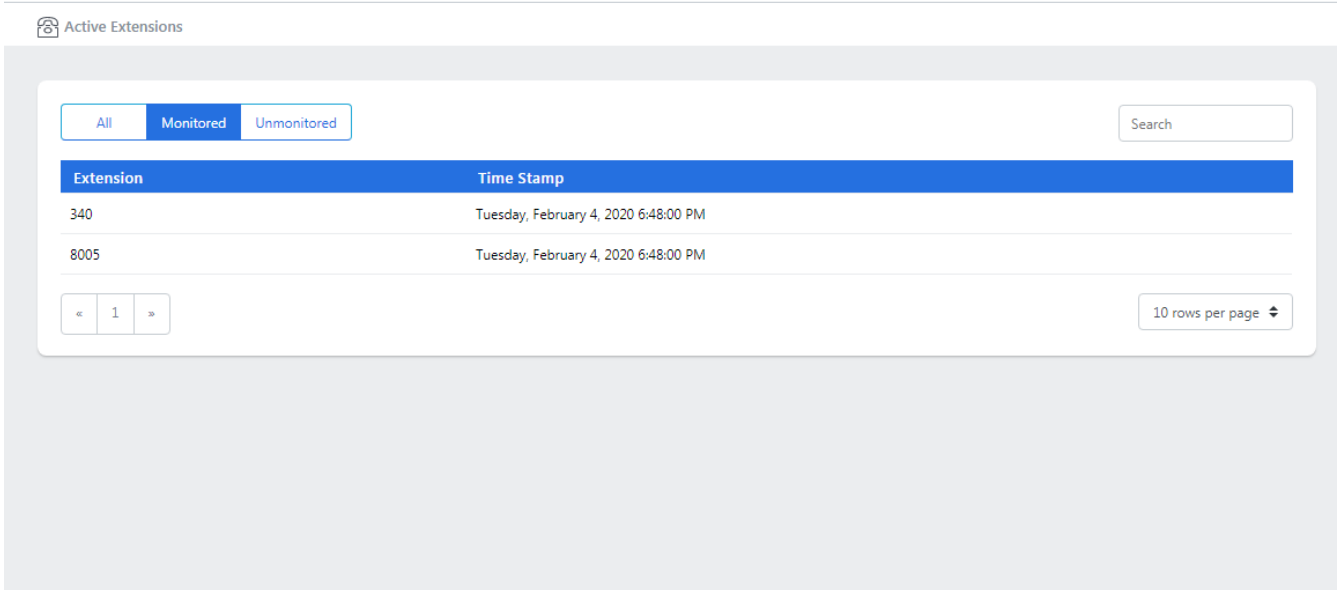

The screenshot shows the 'Active Extensions' page. At the top, there are three tabs: 'All', 'Monitored', and 'Unmonitored'. The 'Monitored' tab is selected. To the right of the tabs is a search box labeled 'Search'. Below the tabs is a table with two columns: 'Extension' and 'Time Stamp'. The table contains two rows of data:


Extension	Time Stamp
340	Tuesday, February 4, 2020 6:48:00 PM
8005	Tuesday, February 4, 2020 6:48:00 PM

At the bottom left of the table area, there are navigation buttons: '<', '1', and '>'. At the bottom right, there is a dropdown menu labeled '10 rows per page'.

Rainbow CTI & Media Bridge 2021

Screenshot-Monitored Extensions

Key in the extension number in order to search for a specific monitored extension, as shown below.

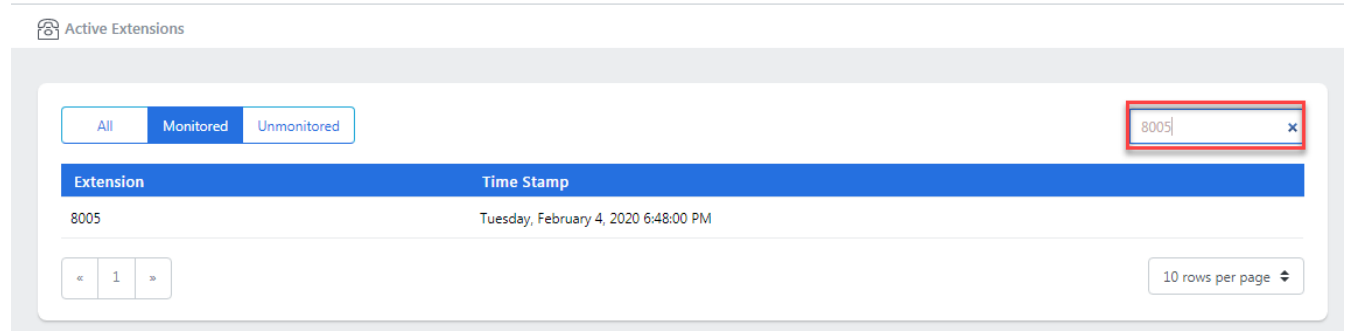

The screenshot shows the 'Active Extensions' page with a search filter applied. The search box at the top right now contains the text '8005' and is highlighted with a red border. The table below shows only one row of data:

Extension	Time Stamp
8005	Tuesday, February 4, 2020 6:48:00 PM


The rest of the page layout, including the tabs and navigation elements, remains the same as in the previous screenshot.

Screenshot-Monitored Extensions

4.4 Unsuccessful monitoring of extensions


There could be many reasons due to which CTI & Media Bridge may not be able to monitor an extension. The reasons could range from missing configuration to a faulty phone cable.

This section gives the total number of extensions that could not be monitored. If you want to see the list of telephone extensions that are not monitored, click on **FAILURE** from **Extension Monitoring** widget, as shown below.

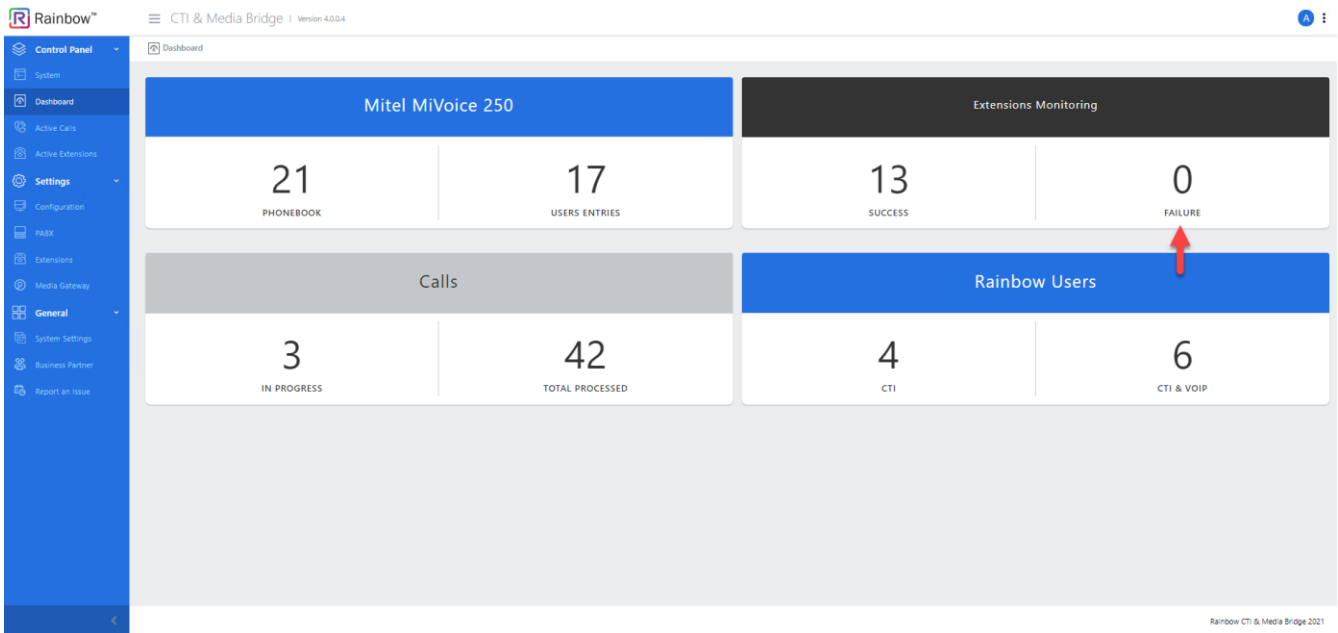

Screenshot-Dashboard

You will be presented with the screen, as shown below

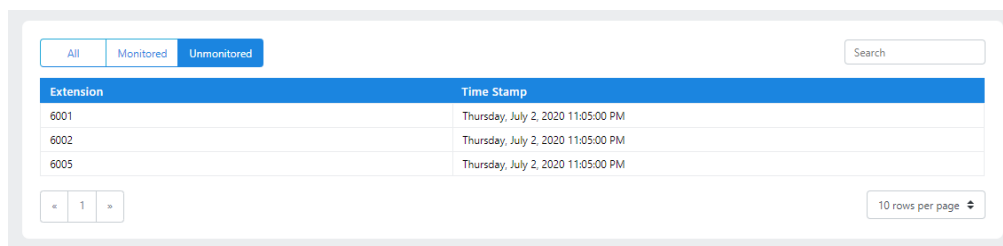


The screenshot shows a table with the following data:

Extension	Time Stamp
6001	Thursday, July 2, 2020 11:05:00 PM
6002	Thursday, July 2, 2020 11:05:00 PM
6005	Thursday, July 2, 2020 11:05:00 PM

At the top of the table, there are tabs for "All", "Monitored", and "Unmonitored" (which is selected). A search box is located to the right of the tabs. At the bottom left, there are navigation arrows and the number "1". At the bottom right, there is a dropdown menu for "10 rows per page".


Screenshot-Unmonitored Extensions

You can also go to active extensions screen by clicking on the Active Extensions tab from the left menu, as shown below:

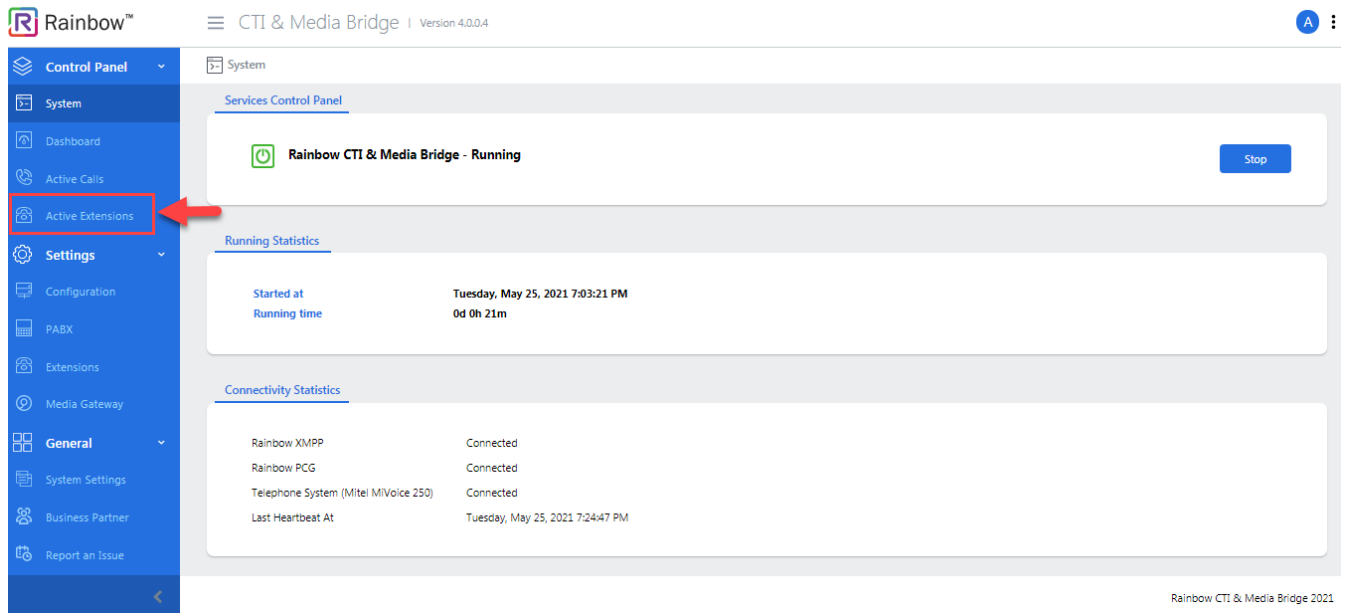

Screenshot-System


You will be presented with the list of both monitored and unmonitored extensions, as shown below:

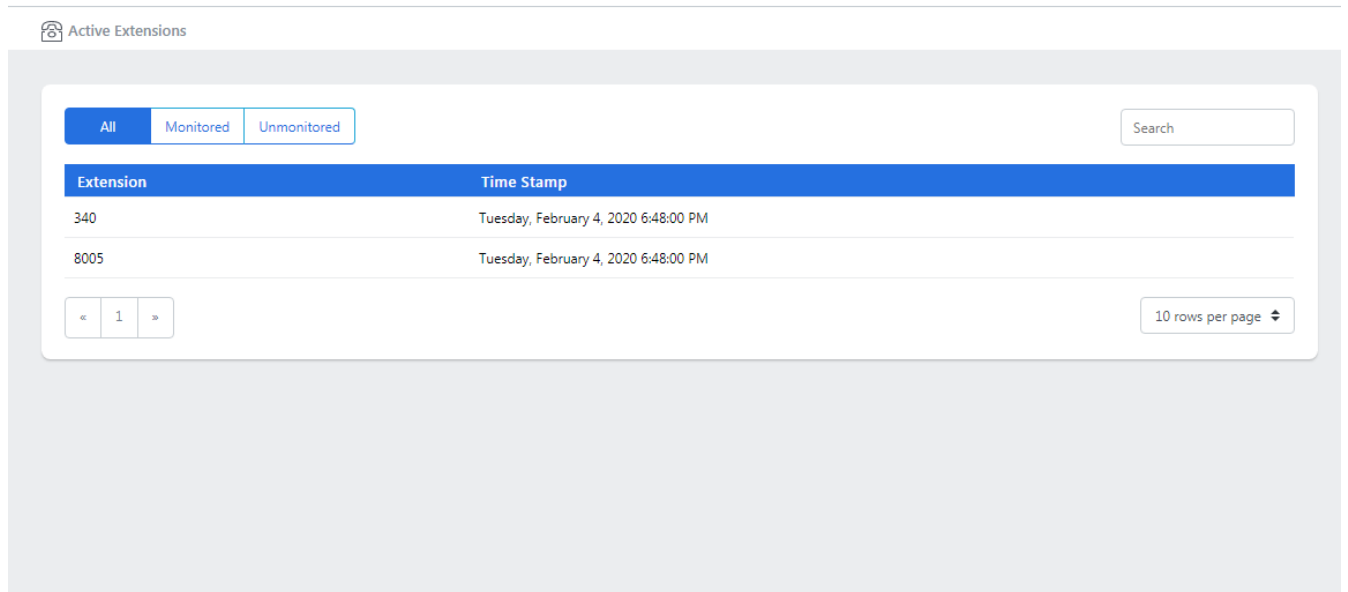

Rainbow CTI & Media Bridge 2021

Screenshot-Active Extensions

Click on the Unmonitored tab from top menu, as shown.

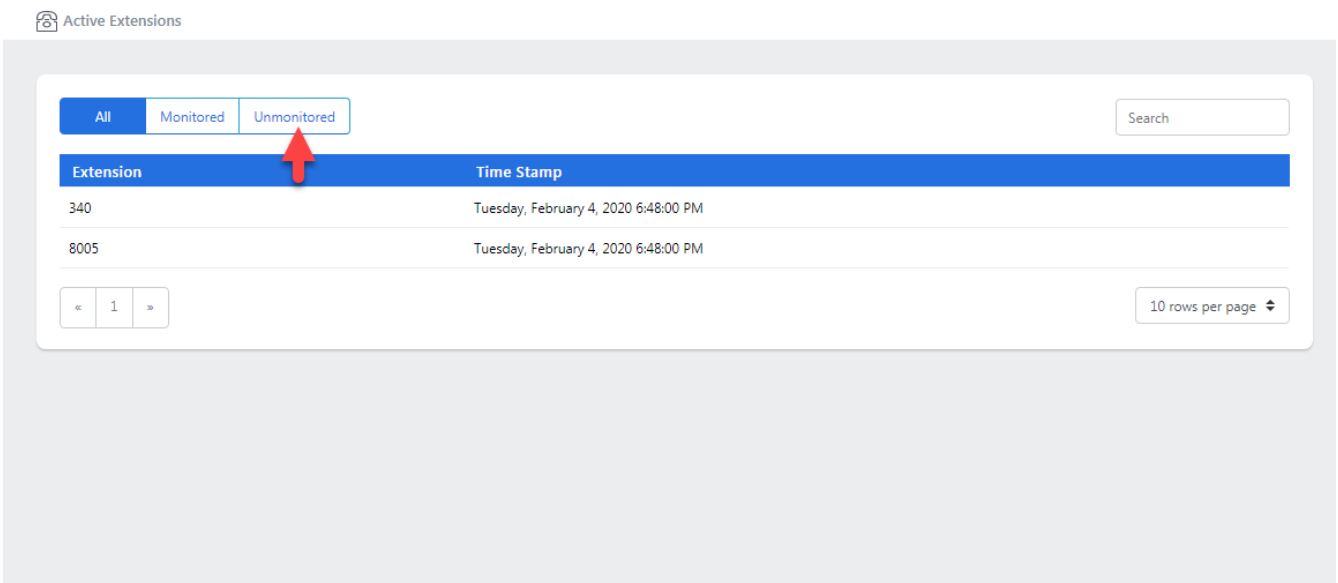

Active Extensions

All Monitored Unmonitored

Search

Extension	Time Stamp
340	Tuesday, February 4, 2020 6:48:00 PM
8005	Tuesday, February 4, 2020 6:48:00 PM


< 1 >

10 rows per page

Rainbow CTI & Media Bridge 2021

Screenshot-Active Extensions

You will be presented with the list of unmonitored extensions, as shown below:

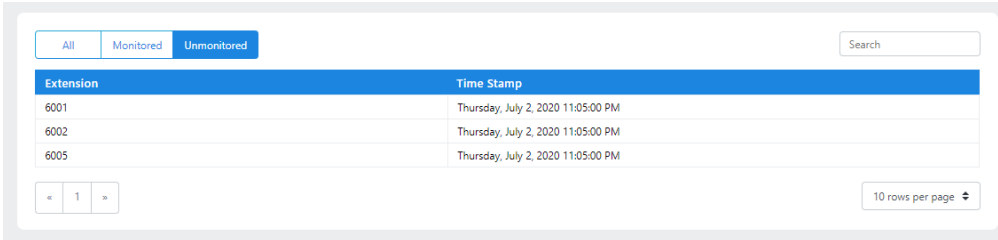

All Monitored Unmonitored

Search

Extension	Time Stamp
6001	Thursday, July 2, 2020 11:05:00 PM
6002	Thursday, July 2, 2020 11:05:00 PM
6005	Thursday, July 2, 2020 11:05:00 PM

< 1 >

10 rows per page


Screenshot-Unmonitored Extensions

Key in the extension number in order to search for a specific unmonitored extension.

4.5 Seeing active calls in the system

Rainbow CTI & Media Bridge provides a way to see the currently in-progress calls in the system. This may be needed during troubleshooting to see if certain calls are being recognized and correctly passed on to Rainbow Server.

To see the details of the calls in progress; click on “IN PROGRESS” from Calls widget, as shown below.

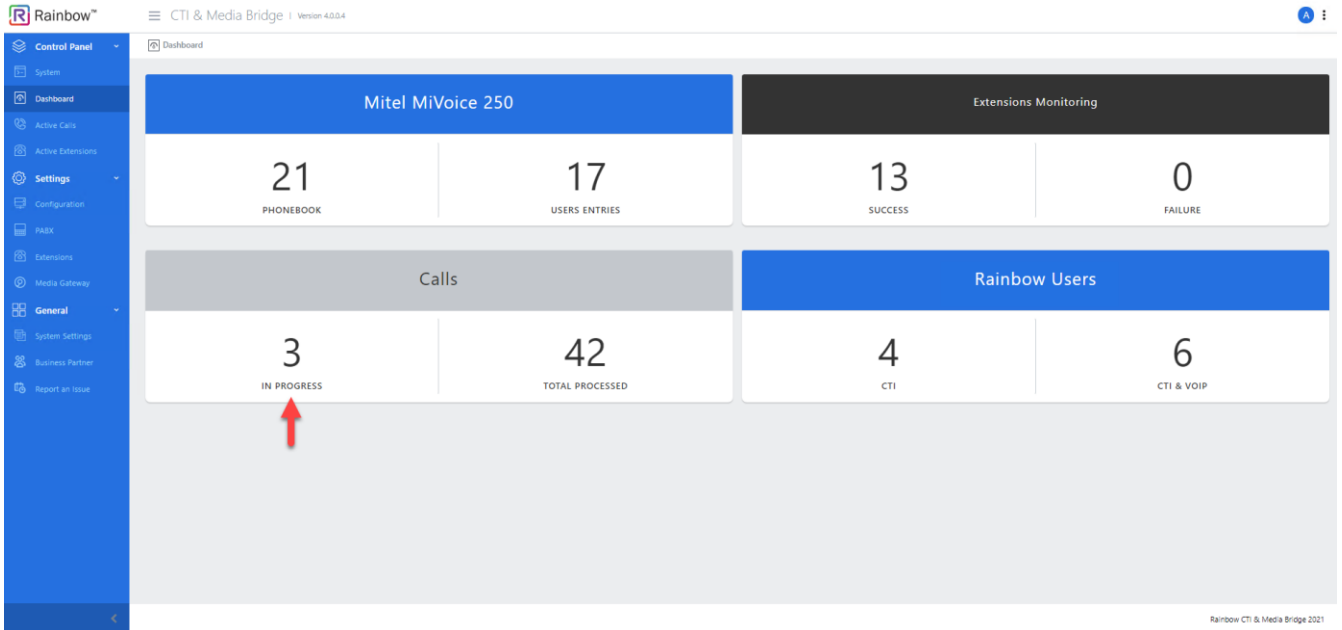


The screenshot shows the Rainbow CTI & Media Bridge dashboard. The left sidebar contains navigation options: Control Panel, System, Dashboard, Active Calls, Active Extensions, Settings, Configuration, PBX, Extensions, Media Gateway, General, System Settings, Business Partner, and Report an Issue. The main dashboard area displays several widgets:

- Mitel MiVoice 250**: 21 PHONEBOOK, 17 USERS ENTRIES.
- Extensions Monitoring**: 13 SUCCESS, 0 FAILURE.
- Calls**: 3 IN PROGRESS (indicated by a red arrow), 42 TOTAL PROCESSED.
- Rainbow Users**: 4 CTI, 6 CTI & VOIP.



The bottom right corner of the dashboard indicates "Rainbow CTI & Media Bridge 2021".

Screenshot-Dashboard

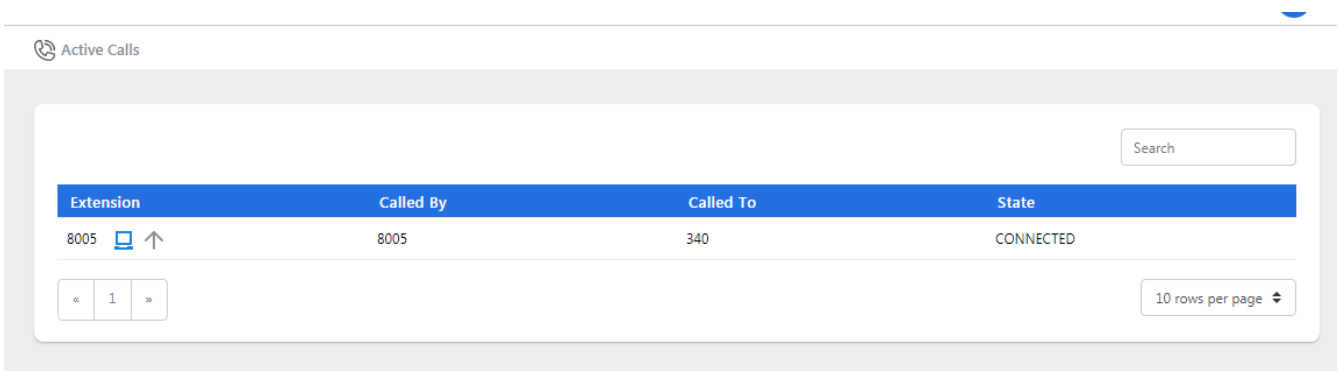You will be presented with the screen with calls' current state, as shown below.



The screenshot shows the "Active Calls" screen. It features a search bar at the top right. Below the search bar is a table with the following columns: Extension, Called By, Called To, and State. The table contains one row of data:

Extension	Called By	Called To	State
8005  	8005	340	CONNECTED

At the bottom left, there are navigation controls showing "1" in a box, and at the bottom right, there is a "10 rows per page" dropdown menu.

Screenshot-Active Calls

Connected calls will be shown, as below.


Active Calls

Extension	Called By	Called To	State
8005	8005	340	CONNECTED

< 1 >
10 rows per page

Screenshot-Active Calls

The “**Total Processed**” stat shows the total number of calls; Rainbow CTI & Media Bridge service has processed since its last restart.

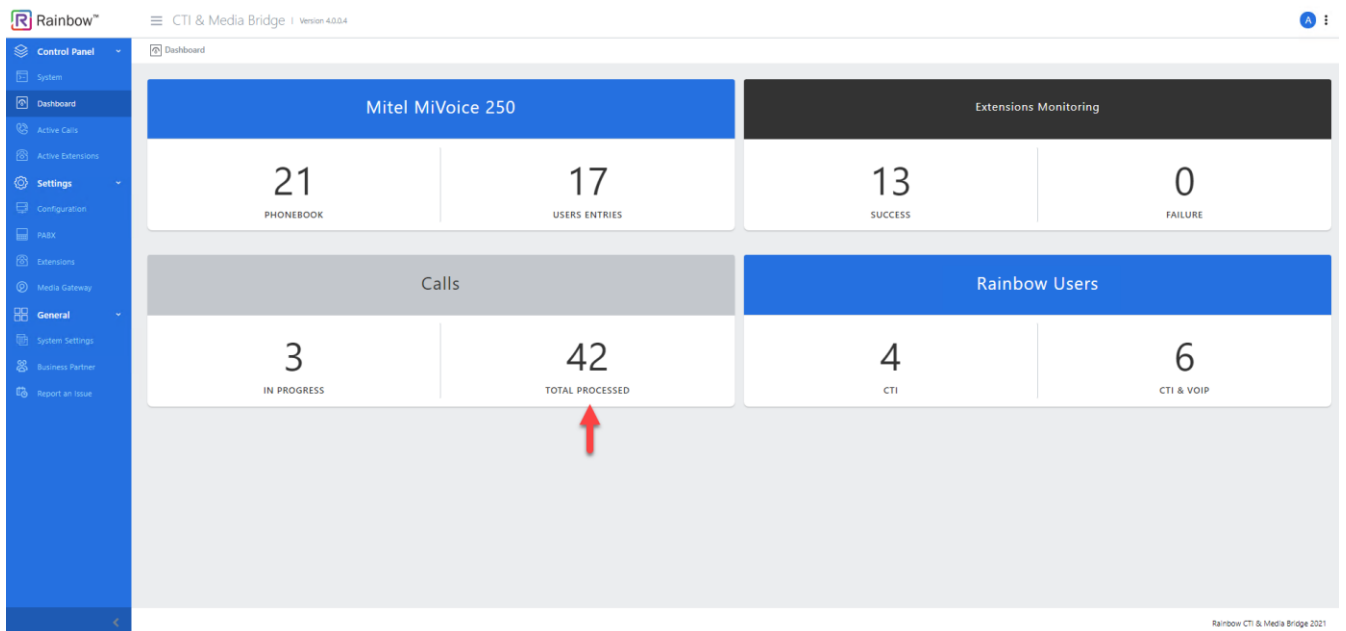

The dashboard displays several key performance indicators (KPIs) for the Mitel MiVoice 250 system. A red arrow points to the 'TOTAL PROCESSED' stat, which is 42.


Mitel MiVoice 250		Extensions Monitoring	
21 <small>PHONEBOOK</small>	17 <small>USERS ENTRIES</small>	13 <small>SUCCESS</small>	0 <small>FAILURE</small>
Calls		Rainbow Users	
3 <small>IN PROGRESS</small>	42 <small>TOTAL PROCESSED</small>	4 <small>CTI</small>	6 <small>CTI & VOIP</small>

Screenshot-Dashboard

4.6 Seeing active users in the system

Rainbow CTI & Media Bridge provides a way to see the currently active users in the system (CTI users as well as CTI & VOIP users).

To see the details of the CTI users; click on “CTI” from **Rainbow Users** widget, as shown below.

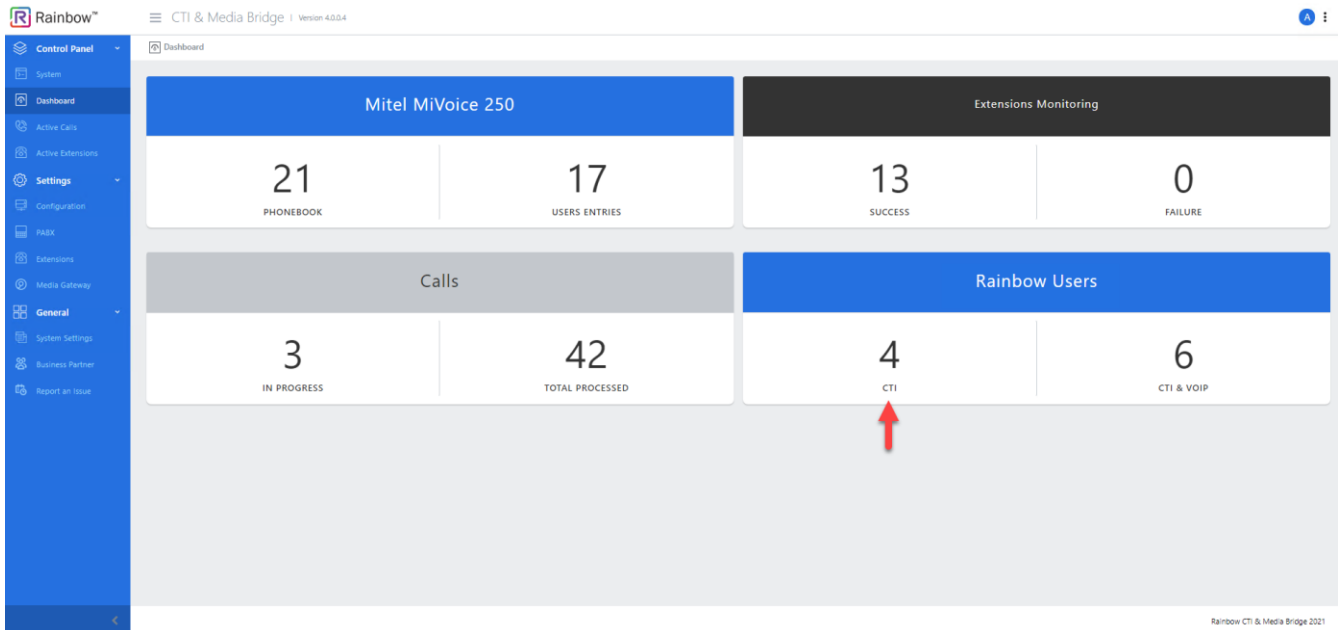


The screenshot shows the Rainbow CTI & Media Bridge dashboard. The dashboard is divided into several sections:

- Mitel MiVoice 250**:
 - PHONEBOOK: 21
 - USERS ENTRIES: 17
- Extensions Monitoring**:
 - SUCCESS: 13
 - FAILURE: 0
- Calls**:
 - IN PROGRESS: 3
 - TOTAL PROCESSED: 42
- Rainbow Users**:
 - CTI: 4 (indicated by a red arrow)
 - CTI & VOIP: 6

Screenshot-Dashboard

You will be presented with the screen with Rainbow users using CTI extension, as shown below.

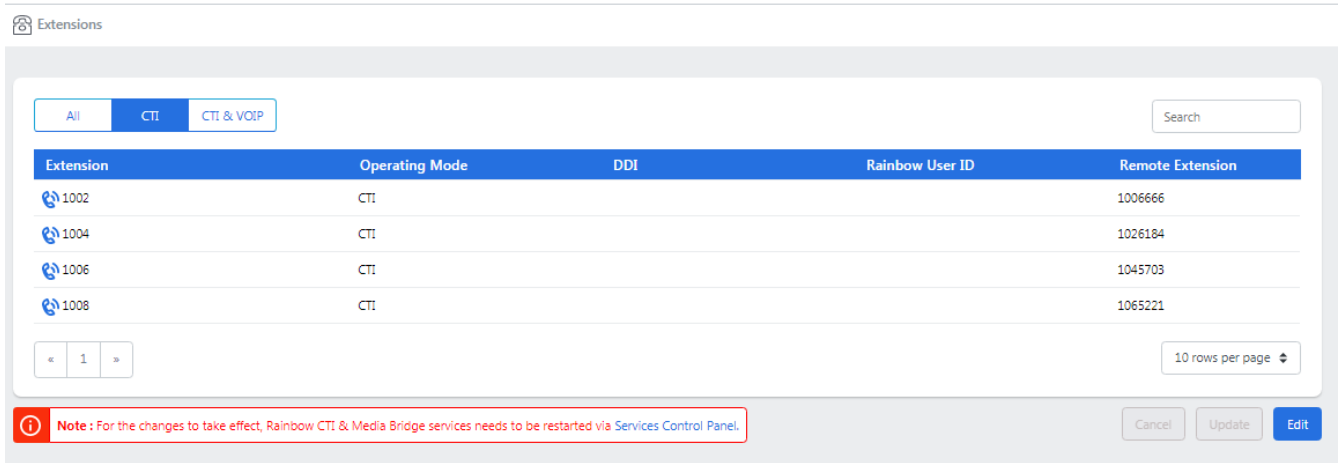


The screenshot shows the Rainbow CTI & Media Bridge Extensions screen. The screen displays a table of active users with the following columns: Extension, Operating Mode, DDI, Rainbow User ID, and Remote Extension. The 'CTI' tab is selected, and the table shows 4 rows of data:

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1002	CTI			1006666
1004	CTI			1026184
1006	CTI			1045703
1008	CTI			1065221

At the bottom of the screen, there is a note: "Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel." There are also buttons for Cancel, Update, and Edit.


Screenshot- CTI Extensions

You can also go to statistics screen by clicking on the Extension tab from the left menu, as shown.

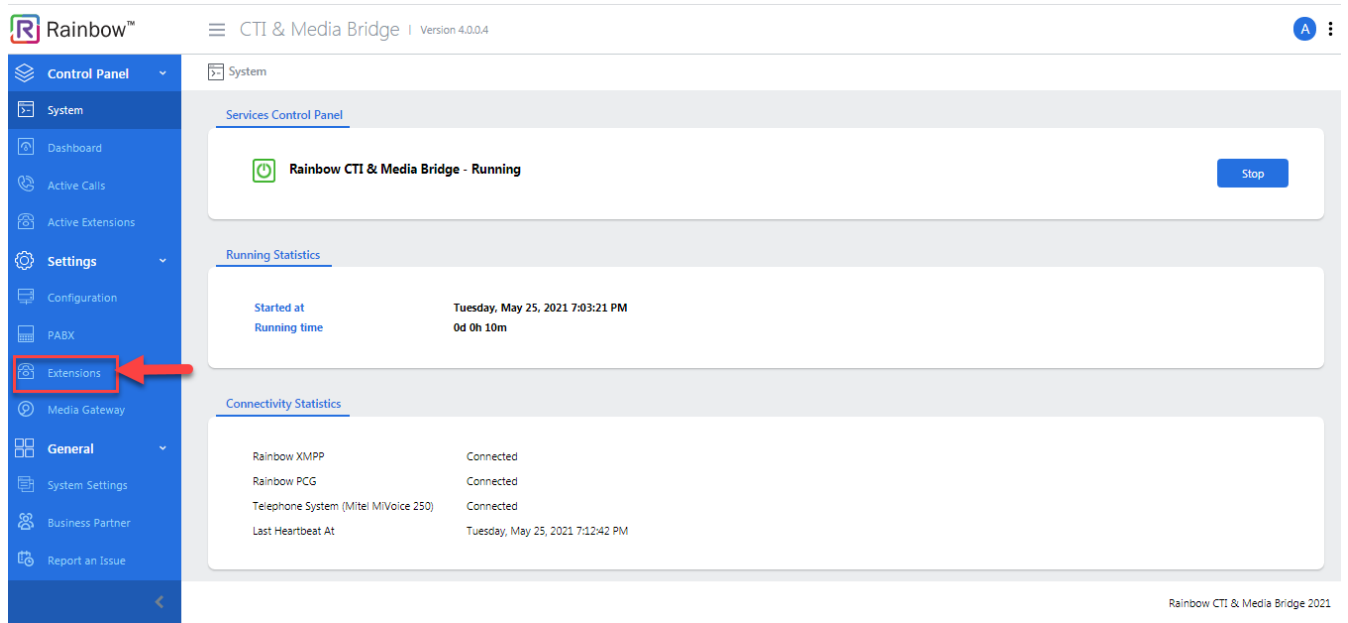


Screenshot-System

You will be presented with the list of all user both CTI and CTI & VOIP extensions, as shown below:

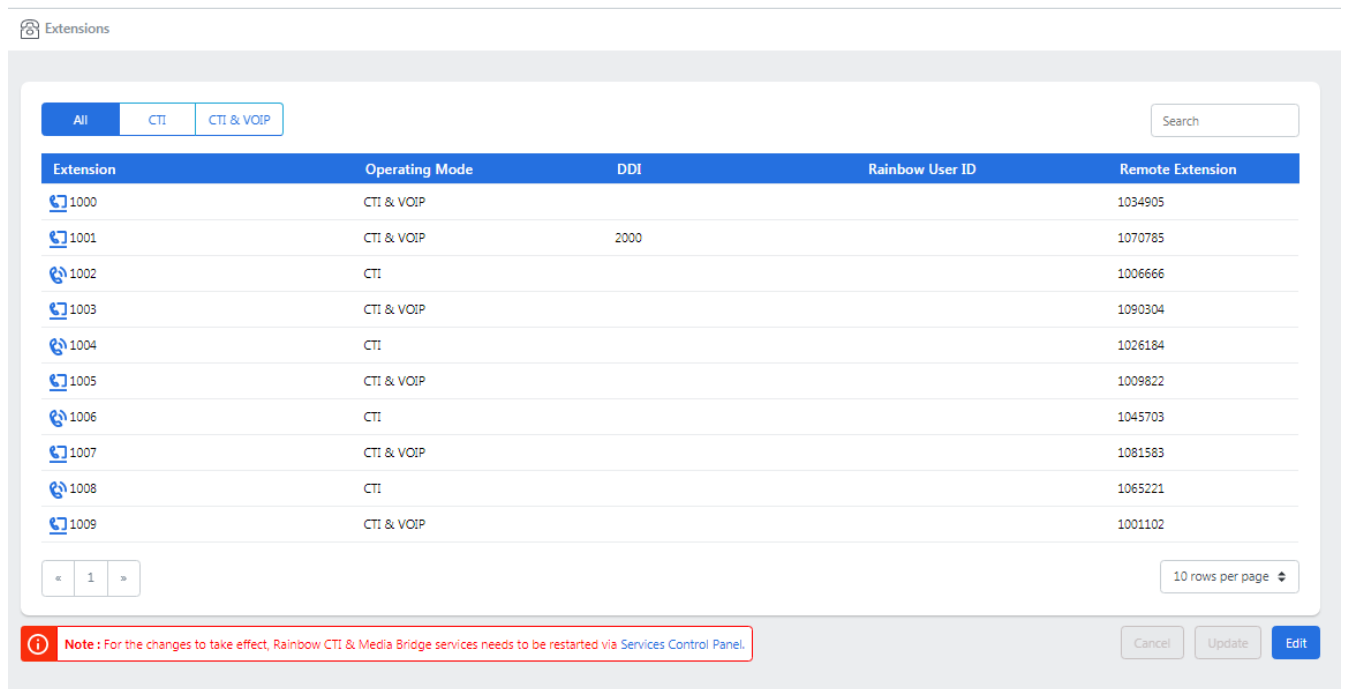

Screenshot- Extensions

Click on the CTI tab from top menu, as shown below.

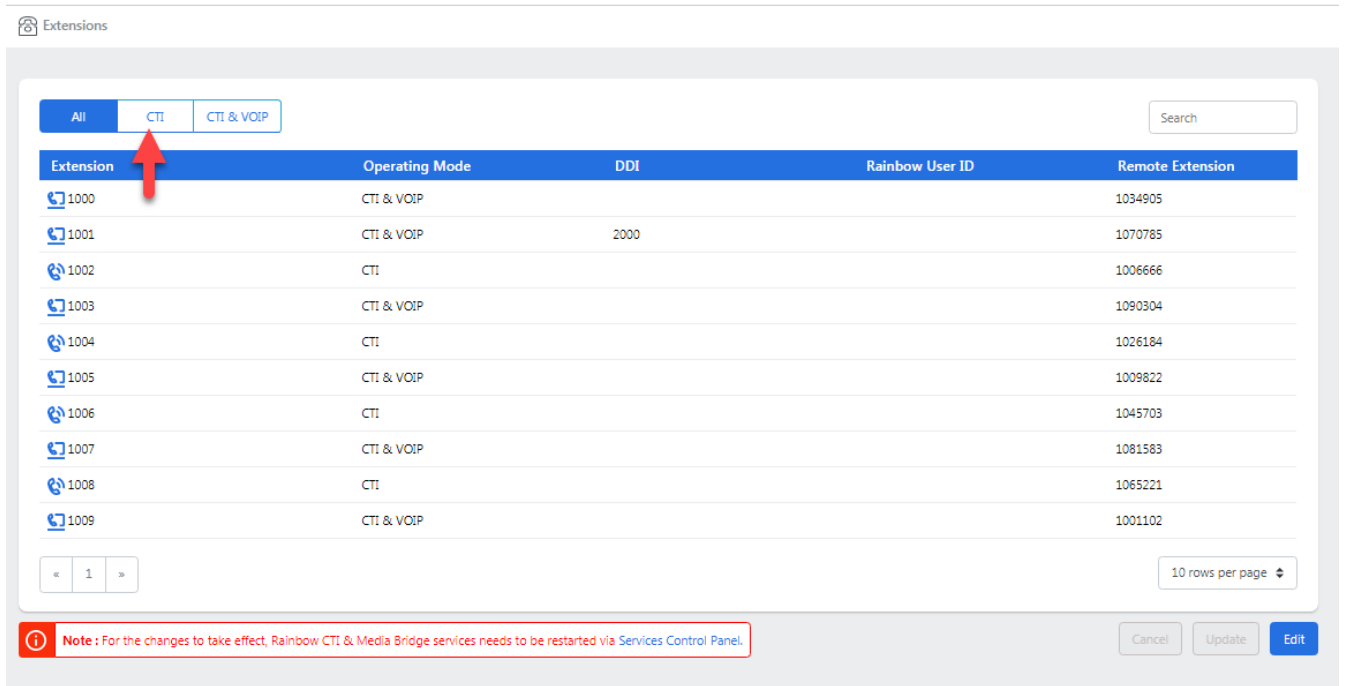

Extensions

All CTI CTI & VOIP Search

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1000	CTI & VOIP			1034905
1001	CTI & VOIP	2000		1070785
1002	CTI			1006666
1003	CTI & VOIP			1090304
1004	CTI			1026184
1005	CTI & VOIP			1009822
1006	CTI			1045703
1007	CTI & VOIP			1081583
1008	CTI			1065221
1009	CTI & VOIP			1001102


Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Cancel Update Edit

Rainbow CTI & Media Bridge 2021

Screenshot- Extensions

You will be presented with the CTI extensions, as shown below

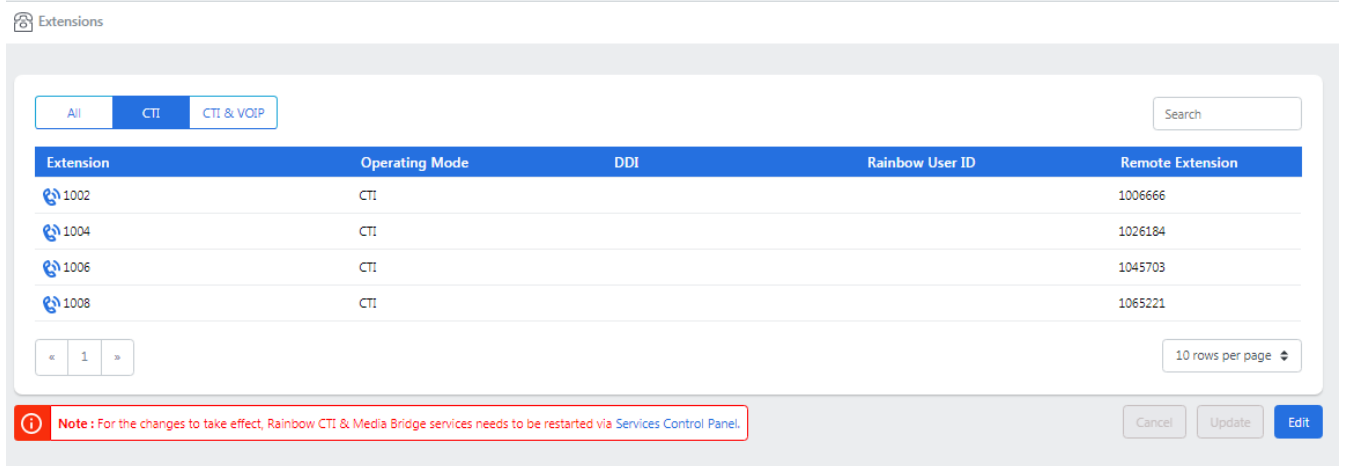

Extensions

All CTI CTI & VOIP Search


Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1002	CTI			1006666
1004	CTI			1026184
1006	CTI			1045703
1008	CTI			1065221

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Cancel Update Edit


Screenshot- CTI Extensions

Key in the extension number in order to search for a specific monitored extension, as shown below.

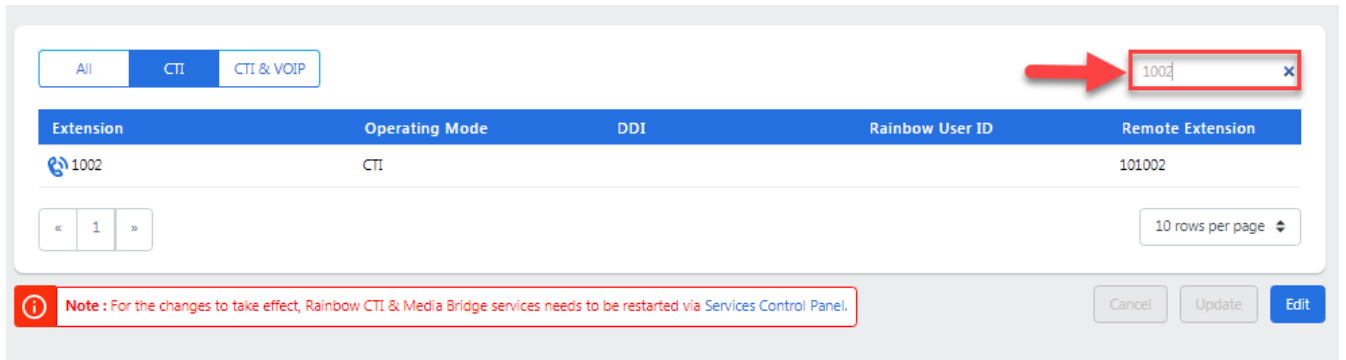


Screenshot-CTI Extensions

To see the details of the CTI & VOIP users; click on “CTI & VOIP” from Rainbow Users widget, as shown below.

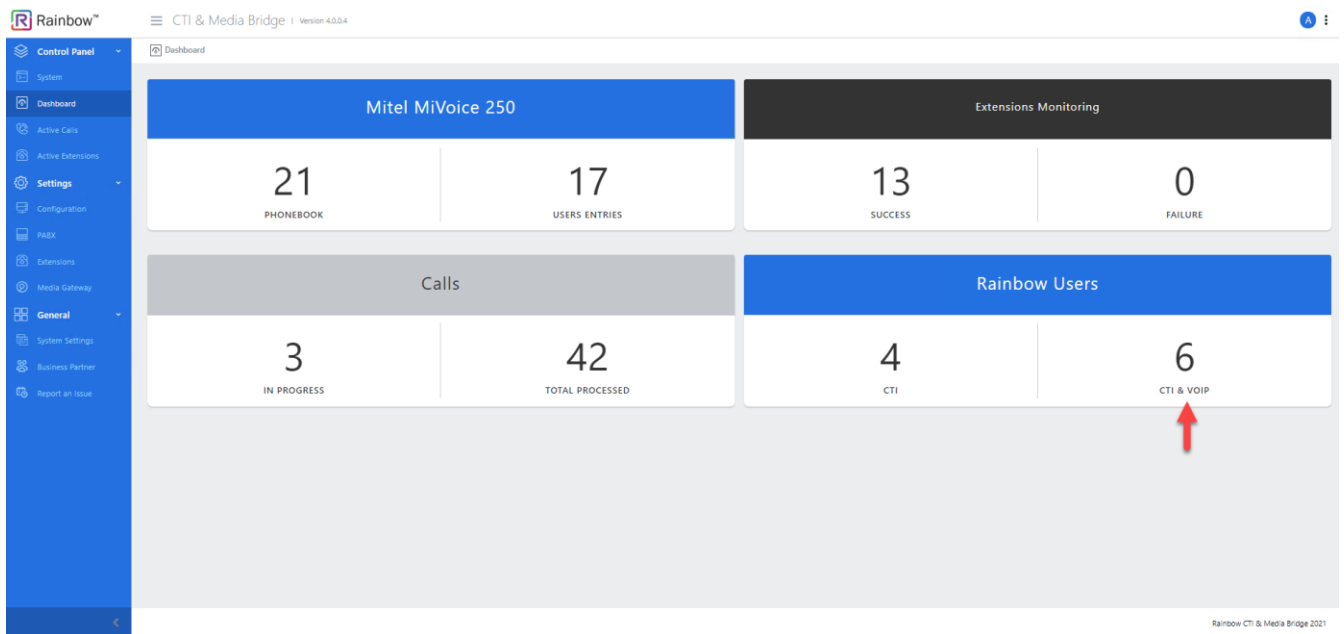

Screenshot-Dashboard

You will be presented with the screen with Rainbow users using CTI & VOIP extension, as shown below.

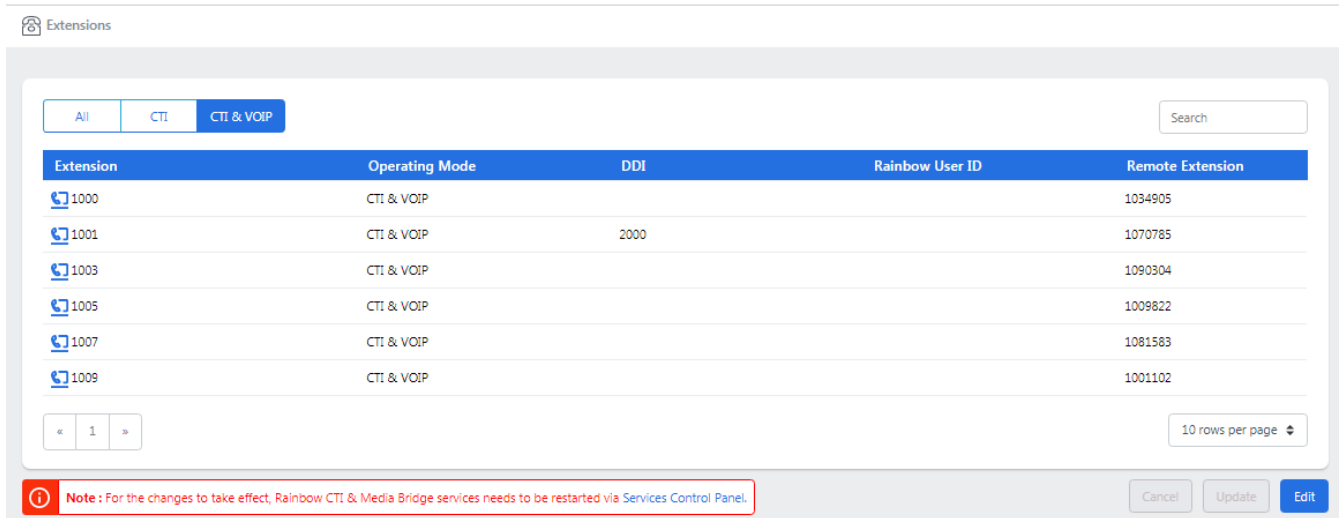


Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1000	CTI & VOIP			1034905
1001	CTI & VOIP	2000		1070785
1003	CTI & VOIP			1090304
1005	CTI & VOIP			1009822
1007	CTI & VOIP			1081583
1009	CTI & VOIP			1001102

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Screenshot-CTI & VOIP Extensions

You can also go to statistics screen by clicking on the Extension tab from the left menu, as shown.

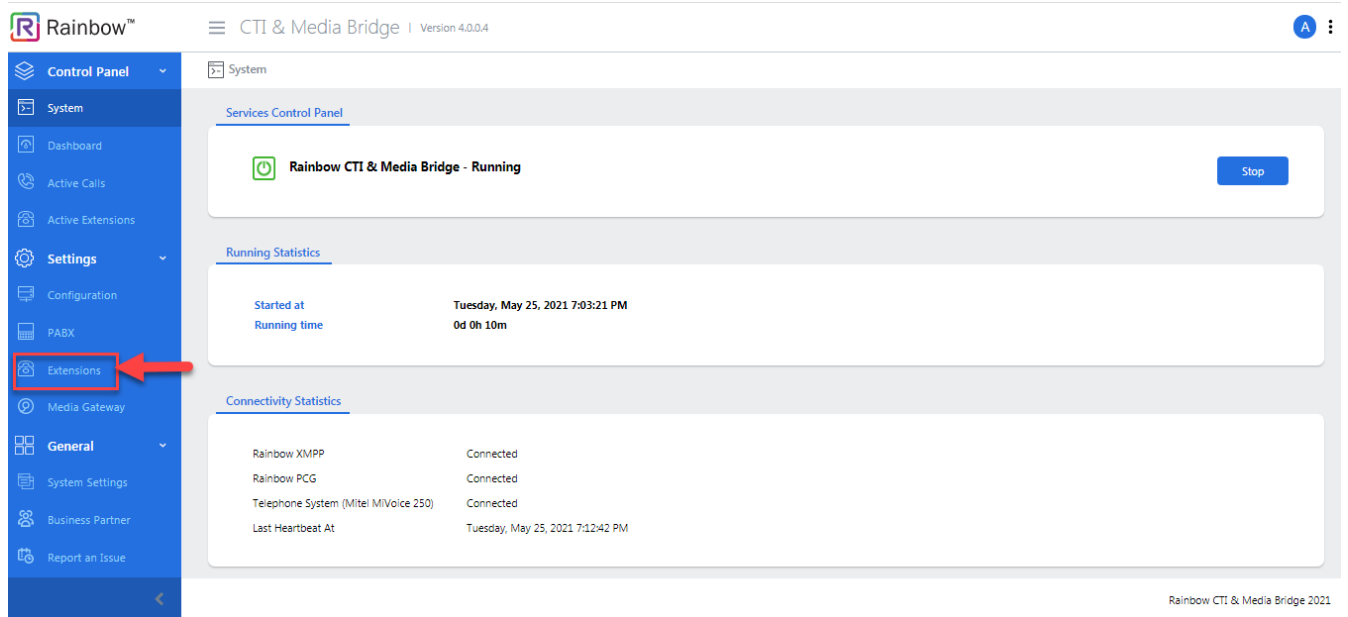

CTI & Media Bridge | Version 4.0.0.4

System

Services Control Panel

Rainbow CTI & Media Bridge - Running Stop

Running Statistics

Started at: Tuesday, May 25, 2021 7:03:21 PM
Running time: 0d 0h 10m


Connectivity Statistics

Rainbow XMPP	Connected
Rainbow PCG	Connected
Telephone System (Mitel Mivoice 250)	Connected
Last Heartbeat At	Tuesday, May 25, 2021 7:12:42 PM

Rainbow CTI & Media Bridge 2021

Screenshot-System

You will be presented with the list of all user both CTI and CTI & VOIP extensions, as shown below:

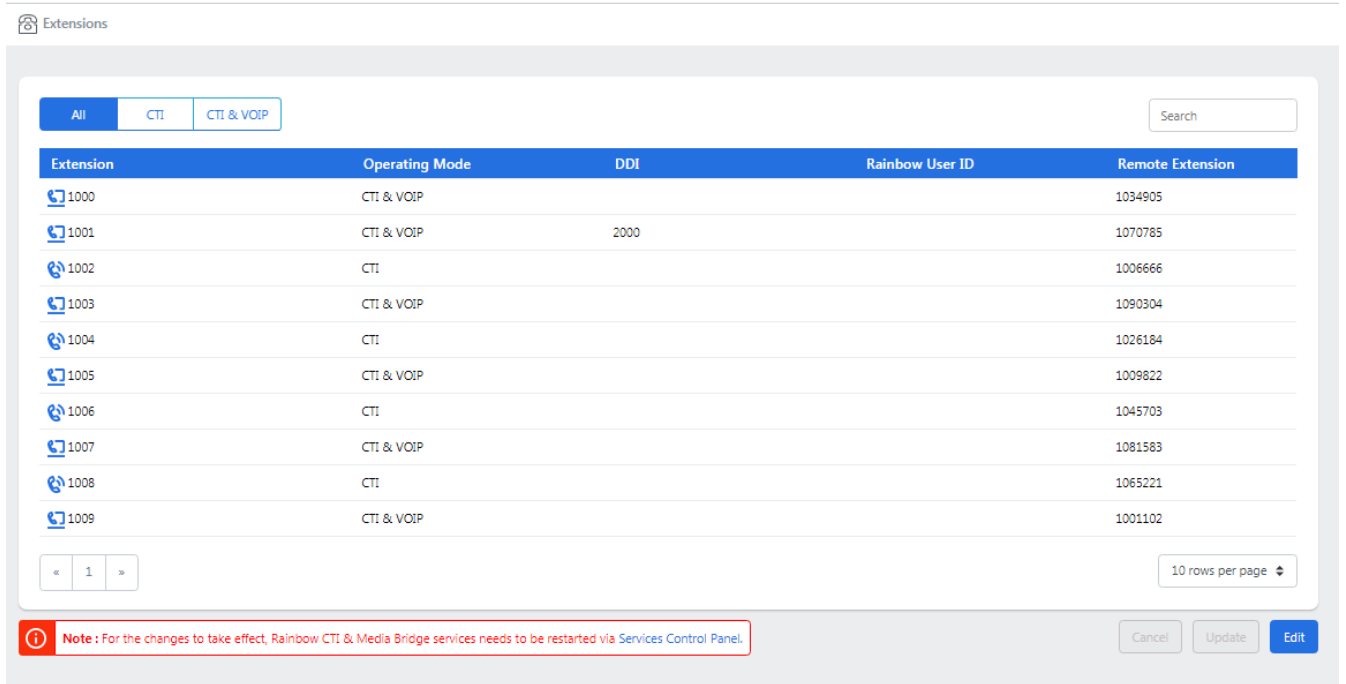


The screenshot shows the 'Extensions' management page. At the top, there are tabs for 'All', 'CTI', and 'CTI & VOIP'. A search box is located to the right. Below the tabs is a table with the following columns: Extension, Operating Mode, DDI, Rainbow User ID, and Remote Extension. The table contains 10 rows of data for extensions 1000 through 1009. At the bottom of the table, there are navigation controls (left arrow, '1', right arrow) and a '10 rows per page' dropdown. A red-bordered note at the bottom states: 'Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.' To the right of the note are 'Cancel', 'Update', and 'Edit' buttons.

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1000	CTI & VOIP			1034905
1001	CTI & VOIP	2000		1070785
1002	CTI			1006666
1003	CTI & VOIP			1090304
1004	CTI			1026184
1005	CTI & VOIP			1009822
1006	CTI			1045703
1007	CTI & VOIP			1081583
1008	CTI			1065221
1009	CTI & VOIP			1001102

Rainbow CTI & Media Bridge 2021

Screenshot- Extensions

Click on the CTI & VOIP tab from top menu, as shown below:

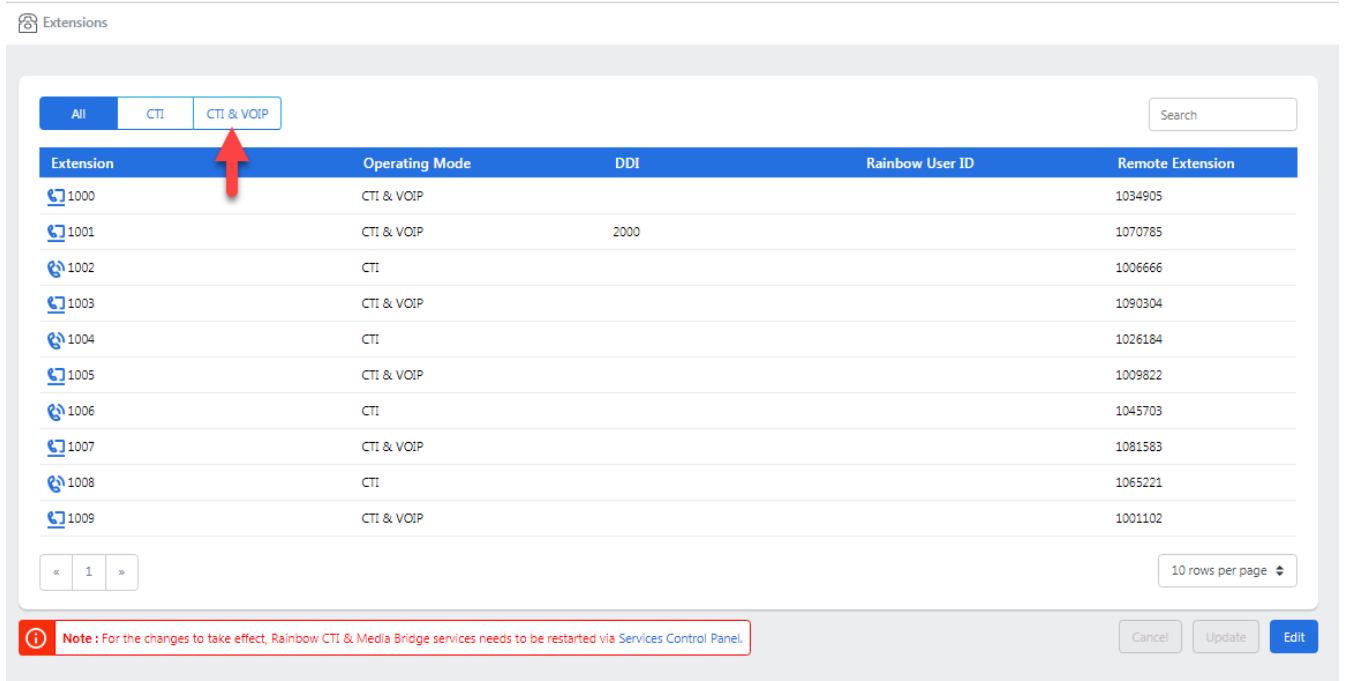


This screenshot is identical to the one above, but with a red arrow pointing to the 'CTI & VOIP' tab in the top navigation menu, indicating the action to be taken.

Rainbow CTI & Media Bridge 2021

Screenshot- Extensions

You will be presented with the CTI extensions, as shown below

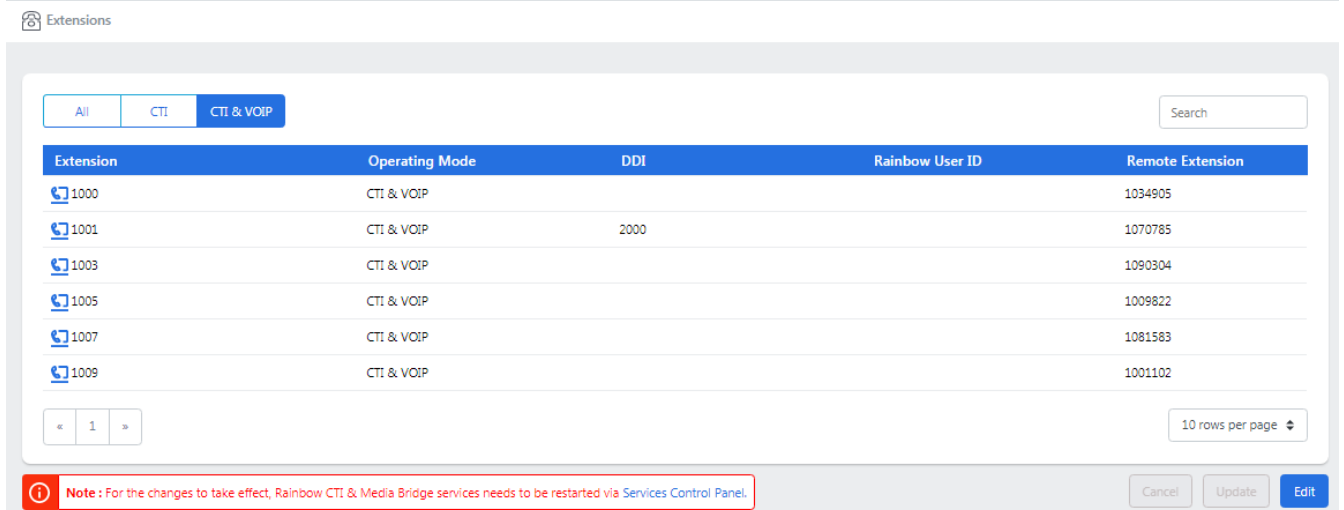


The screenshot shows the 'Extensions' management page with the 'CTI & VOIP' tab selected. A table lists several extensions with their respective details. A search bar is present in the top right corner. A note at the bottom indicates that services need to be restarted for changes to take effect.

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1000	CTI & VOIP			1034905
1001	CTI & VOIP	2000		1070785
1003	CTI & VOIP			1090304
1005	CTI & VOIP			1009822
1007	CTI & VOIP			1081583
1009	CTI & VOIP			1001102

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Screenshot- CTI & VOIP Extensions

Key in the extension number in order to search for a specific monitored extension, as shown below.

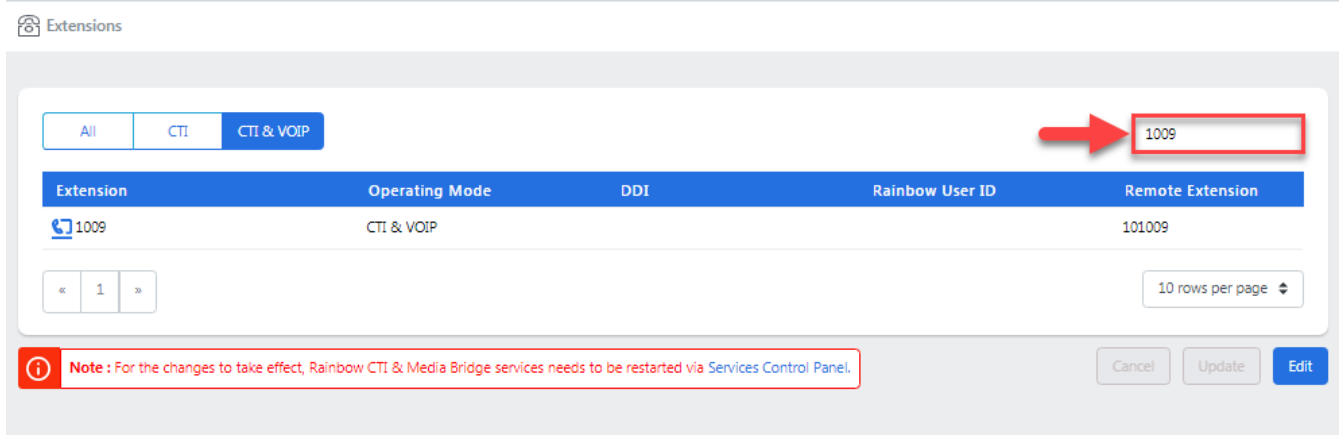

This screenshot shows the same 'Extensions' management page, but with the search bar in the top right corner containing the number '1009'. A red arrow points to the search bar, and the table below now only displays the extension with ID 1009.

Extension	Operating Mode	DDI	Rainbow User ID	Remote Extension
1009	CTI & VOIP			101009


Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Screenshot-CTI & VOIP Extensions

5 General


5.1 System Settings

In order to setup traces and SMTP settings, click on System settings option in the left-hand menu as shown below:

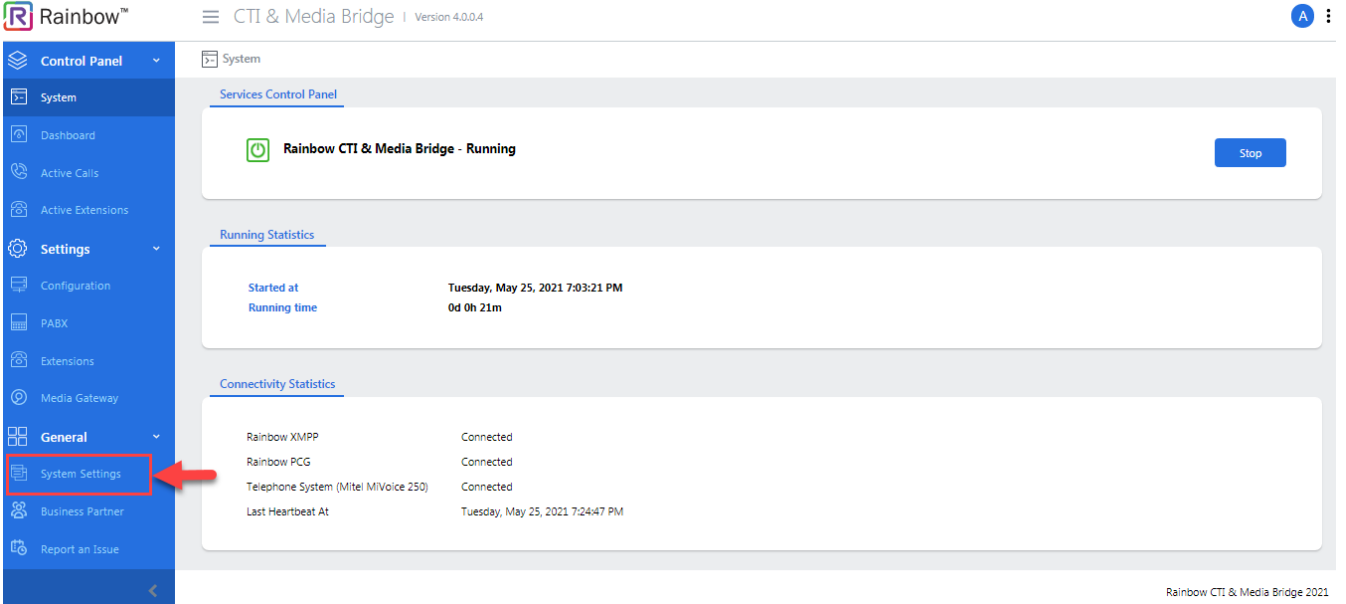

The screenshot shows the Rainbow CTI & Media Bridge administration interface. The left-hand menu is expanded to 'General', and 'System Settings' is highlighted with a red box and a red arrow. The main content area shows the 'System' page with sections for 'Services Control Panel', 'Running Statistics', and 'Connectivity Statistics'.

Services Control Panel

 Rainbow CTI & Media Bridge - Running	Stop
--	----------------------

Running Statistics

Started at	Tuesday, May 25, 2021 7:03:21 PM
Running time	0d 0h 21m

Connectivity Statistics

Rainbow XMPP	Connected
Rainbow PCG	Connected
Telephone System (Mitel Mivoice 250)	Connected
Last Heartbeat At	Tuesday, May 25, 2021 7:24:47 PM

Rainbow CTI & Media Bridge 2021

Screenshot-System

Following screen will be displayed:

System Settings

Traces

Location *

File Size * (Kbs)

No of Files *

General

Telephony

Communication

Error

SMTP Settings

Server *

Port *

Username

Password

Sender Email Address *

SSL Enabled

[Test SMTP Settings](#)

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

[Cancel](#) [Update](#)

Rainbow CTI & Media Bridge 2021

Screenshot - System Settings

5.1.1 Traces

The first section of System settings page is concerned with configuration of traces. A combination of Traces categories can be selected to generate logs only for the relevant information that is needed for troubleshooting. Once you have entered the details into each field, click **Update**, as shown below

Traces

Location *

File Size * (Kbs)

No of Files *

General

Telephony

Communication

Error

Screenshot-Traces

NOTE: *The more comprehensive the traces are, the more CPU resources are used up by the server. Please be careful when setting up tracing level.*

NOTE: *Traces do not need to be enabled during usual functional activities. If there is an issue being experienced then support engineers can set the appropriate trace levels. CTI & Media Bridge service restart is required after updating the traces configuration.*

5.1.2 SMTP Settings

Rainbow CTI & Media Bridge provides the ability to send emails to business partners whenever an issue is encountered in the application. In order to activate this email feature, you need to provide details of the SMTP server that will be used to send the emails.

To configure SMTP settings, you need to provide the following information:

Server:

This is IP address domain name of your SMTP server.

Port:

This is the port used for sending emails by SMTP server.

Username:

This is the username used when sending emails from Rainbow CTI & Media Bridge to your SMTP Server.

Password:

This is the password used when sending email from Rainbow CTI & Media Bridge to your SMTP server.

Sender Email Address:


This is the email address used for sending the emails.

SSL Enabled:

This is the connection that will be used for sending emails from secure SMTP server. This option should be checked, if you're using TLS enabled secure SMTP server.


Note: *Username and password are optional fields for cases where Authentication is not setup for outgoing SMTP server.*

A special button by the name of Test SMTP settings is available at the bottom of the section. Click on it and if the settings are valid, following pop up window will be displayed:

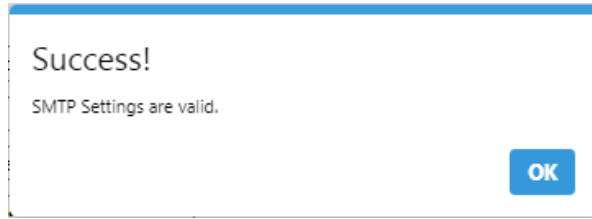

Screenshot-Message from Application

In case of invalid SMTP settings, following pop up window will be displayed:

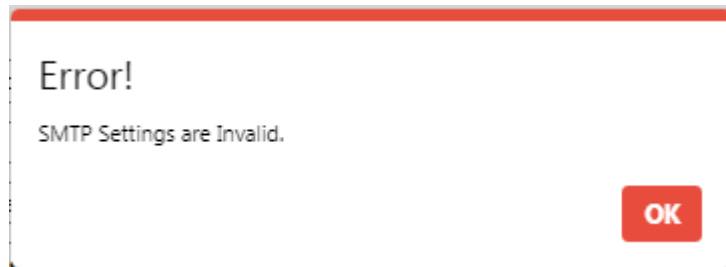

Screenshot-Message from Application

Once you have provided required information in Traces section and SMTP settings section, click on Update button as shown below:

System Settings

Traces

Location *

File Size * (Kbs)

No of Files *

General

Telephony

Communication

Error

SMTP Settings

Server *

Port *

Username

Password

Sender Email Address *


SSL Enabled

Note: For the changes to take effect, Rainbow CTI & Media Bridge services needs to be restarted via Services Control Panel.

Rainbow CTI & Media Bridge 2021

Screenshot - System Settings


You will be presented with the popup window, click **OK**, as shown below.

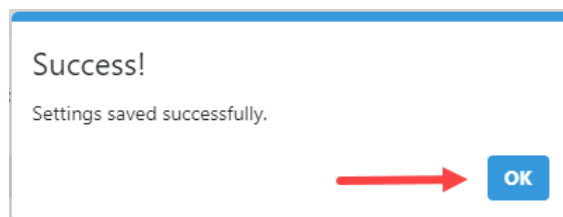

Screenshot-Message from Application


5.2 Business Partner

Rainbow CTI & Media Bridge enables users to send emails to their businesses partners whenever a technical issue is encountered through Report an Issue section. Information provided in Business partner section is used to send an email to your cornered partner. In order to provide contact information for your partner, click on Business Partner option in left hand menu as shown below:

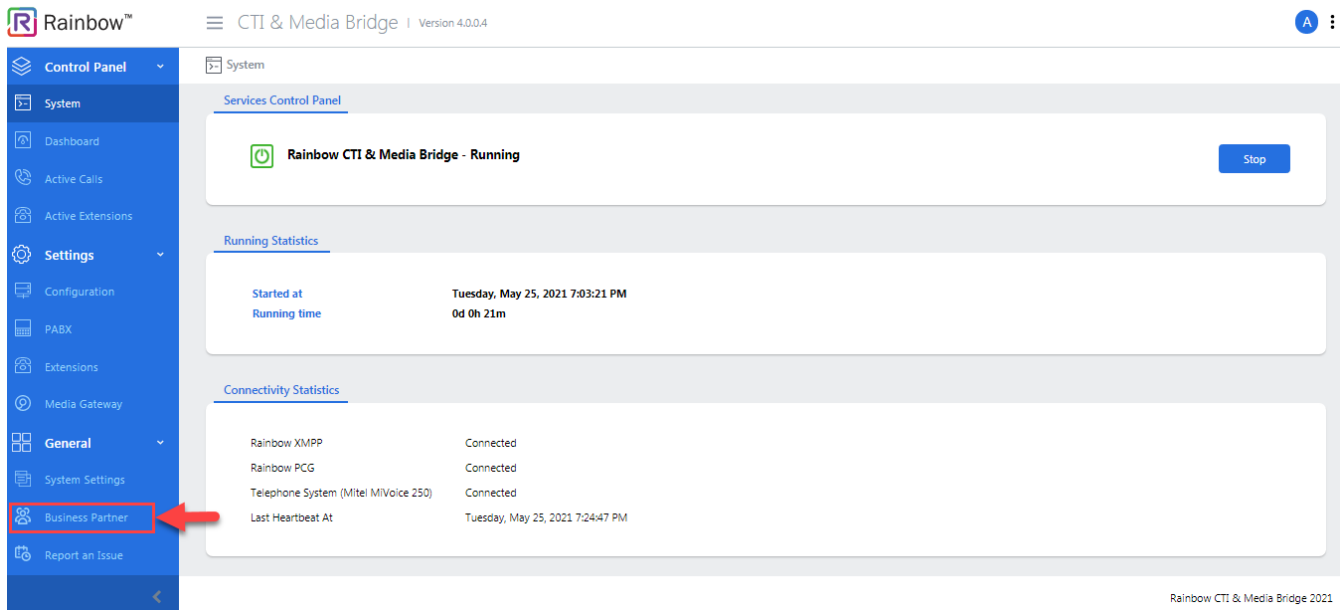


Screenshot - System

Following page will be displayed:

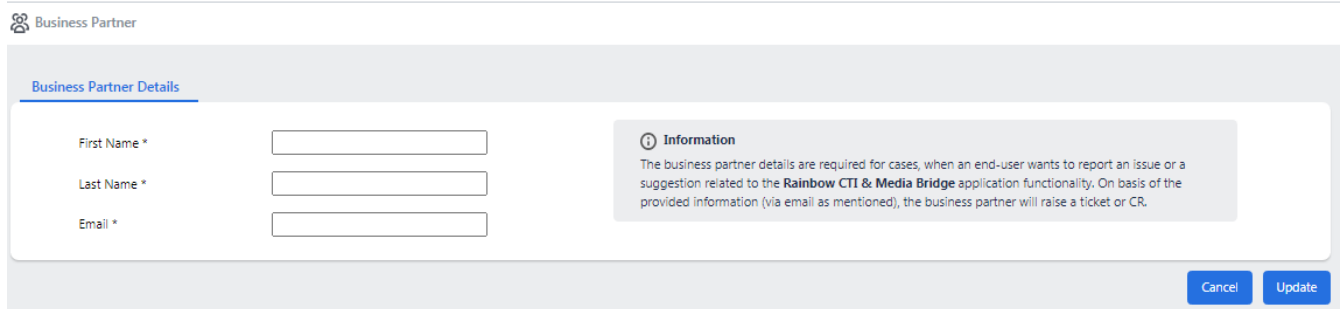


Screenshot - Business Partner

All the fields in this page are self-explanatory. Once the required information is entered, click on the update button as displayed below:

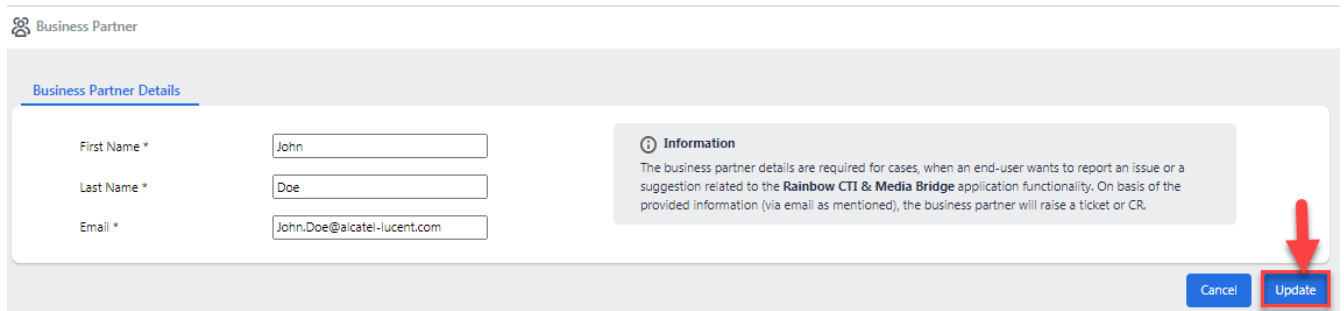

Screenshot - Business Partner


You will be presented with the popup window, click **OK**, as shown below.

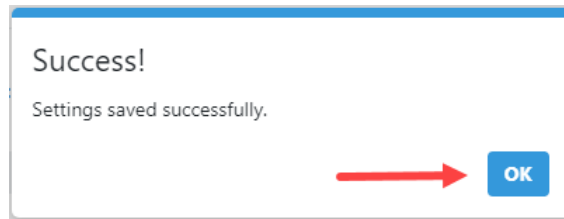

Screenshot-Message from Application


5.3 Report an Issue

Users of Rainbow CTI & Media Bridge are empowered to report any technical issue to their business partner from within the application. For this, click on Report an Issue option from the left menu as shown below:

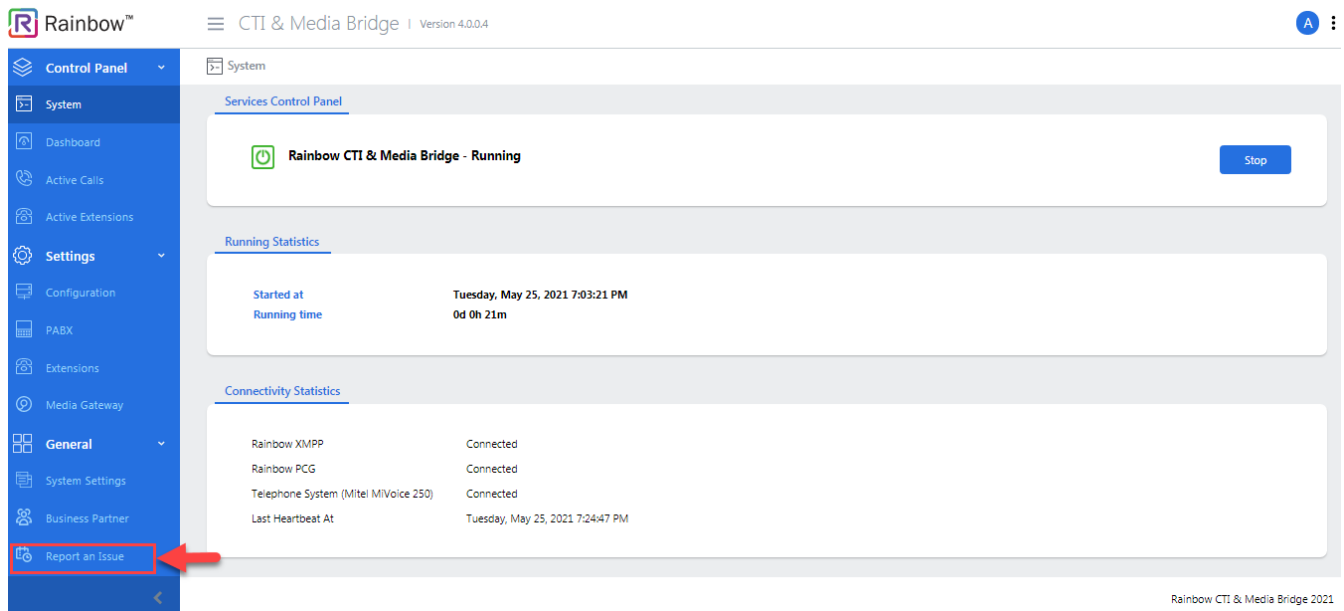

Screenshot - System

Following screen will be displayed:

 Report an Issue

Issue Details

Site/Customer Name

Issue Occurrence

Summary

Description

Environment
(operating system, software platform and/or hardware specifications (include as appropriate for the issue))

Affected Platform

Rainbow Web Application

Rainbow Desktop Application

Rainbow Mobile Application (iOS)

Rainbow Mobile Application (Android)

Rainbow CTI & Media Bridge Administration

Logs Attachments

Rainbow CTI & Media Bridge Logs

Rainbow Web/Desktop Application Logs

webRTC Gateway Logs

Screenshot - Report an Issue

Provide the necessary information in the following fields:

Site /Customer Name:

Provide name of site or customer in this field.

Issue Occurrence:

Select an option that gives a general ideal of how many times does this particular issue occurs. Following options are available:

- Always
- Intermittent
- Rarely

Summary:

Provide a short subject or summary of the technical issue that you are facing.

Description:

Provide a detailed description of the technical issue that you are facing.

Environment:

Provide details about the environment in which the technical issue has been raised.

Affected platform:

Select the platform in which the technical issue has been raised.


Logs Attachments

Select the appropriate logs that should be sent as attachments with the email to Business Partner.

Note: *While reporting an issue, it is advisable to attach the logs (from the required module) as it will help to better understand the problem. However, it is not mandatory and an issue can be reported (via an email) without attaching any logs.*


Once you have provided the necessary information, click on **Submit** button.


You will be presented with the popup window, click **OK**, as shown below.

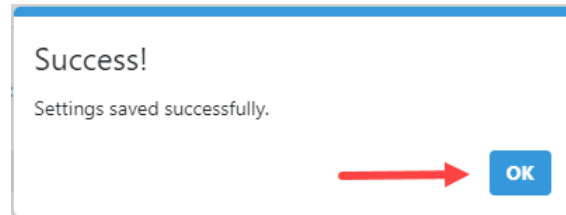

Screenshot-Message from Application


6 Change Password

Users of Rainbow CTI & Media Bridge application can change their account password by clicking on the  icon displayed in the top right corner of any screen as highlighted below:

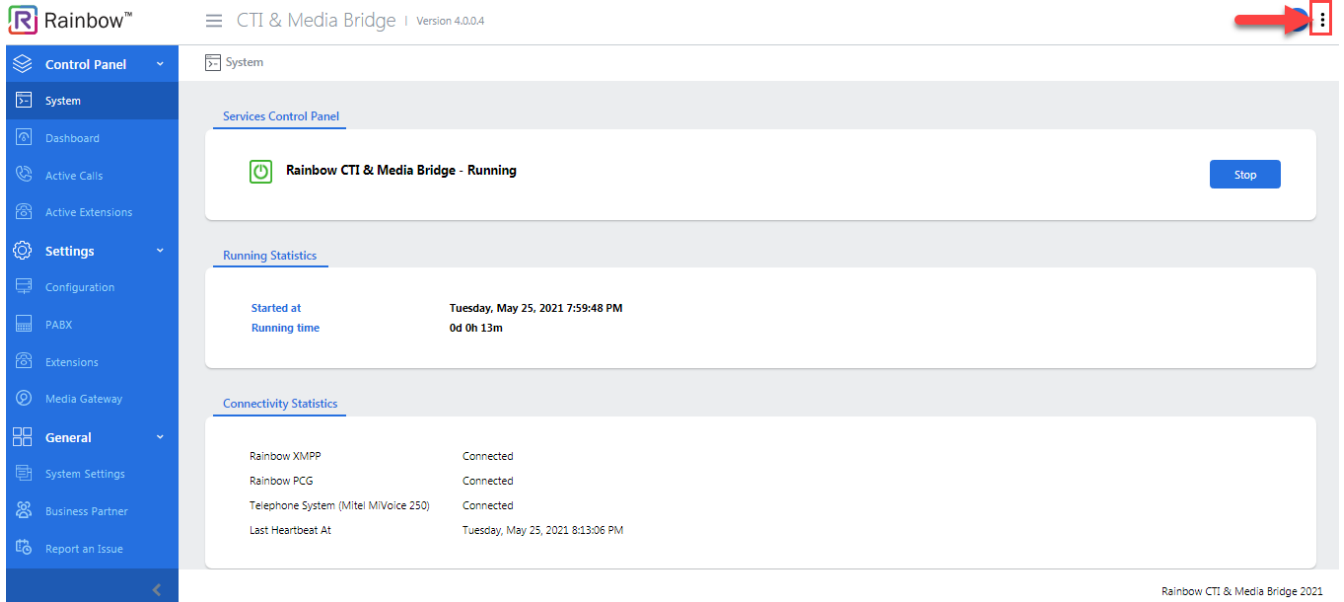


Screenshot-System Page

Following menu opens up when you click on this icon:

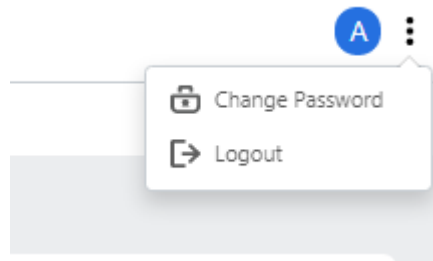

Screenshot- Drop Down Menu

Click on Change Password option and following screen is displayed:

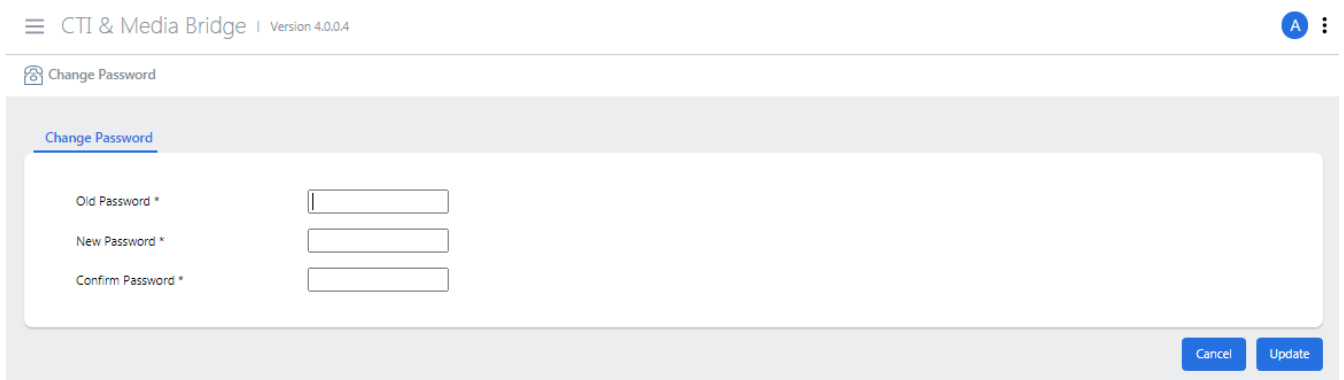


Screenshot- Change Password

All the fields are self-explanatory.

Note: *New password must consist of more than 7 characters.*


Once you have provided required information. Click on Update button as displayed below:

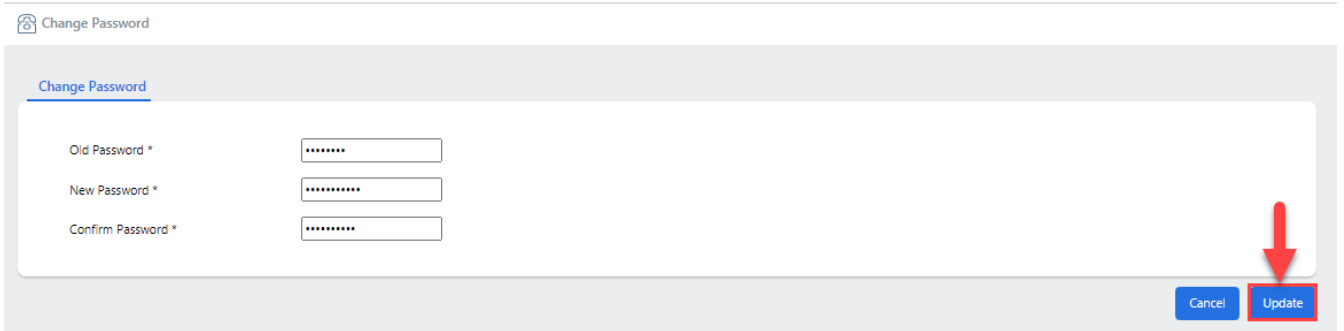

The screenshot shows a web interface for changing a password. The title is "Change Password". There are three input fields: "Old Password *", "New Password *", and "Confirm Password *". Each field contains a masked password (dots). At the bottom right, there are two buttons: "Cancel" and "Update". A red arrow points to the "Update" button.

Screenshot- Change Password

You will be presented with the popup window, click **OK**, as shown below.

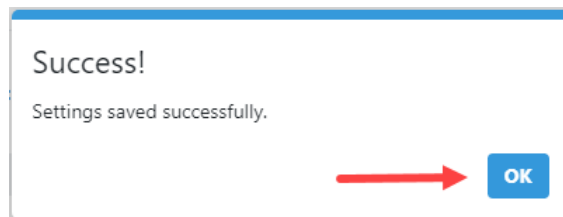

Screenshot-Message from Application

enterprise.alcatel-lucent.com

Alcatel-Lucent and the Alcatel-Lucent Enterprise logo are trademarks of Alcatel-Lucent. To view other trademarks used by affiliated companies of ALE Holding, visit: enterprise.alcatel-lucent.com/trademarks. All other trademarks are the property of their respective owners. The information presented is subject to change without notice. Neither ALE Holding nor any of its affiliates assumes any responsibility for inaccuracies contained herein